

Infrastructure National Technical Specification Notice

INF NTSN – Technical Annex

Draft for preliminary consultation based on the [NTSN published on 1st January 2021](#) with the [ERA proposals for the TSI 2022 package \(Digital Rail and Green Freight\)](#) shown as changes to this. The markup reflects the proposed TSI text, except where this has been amended for applicability to GB, such as substituting 'NTSN' for 'TSI'. Please note, this draft may still include TSI proposals which need to be further amended where text is not applicable to GB.

This is provided to elicit views on the TSI proposals to inform the development of the industry recommendation for similar NTSN changes. It does not reflect RSSB or industry proposals for NTSN changes. These will be provided with a supporting business case for change for consultation in early 2023.

ANNEX

TABLE OF CONTENTS

1. INTRODUCTION	7
1.1. Technical Scope	7
1.2. Geographical Scope	7
1.3. <i>This provision has been left intentionally blank</i>	7
2. DEFINITION AND SCOPE OF SUBSYSTEM	7
2.1. Definition of the infrastructure subsystem	7
2.2. Interfaces of this NTSN with other NTSNs.....	8
2.3. Interfaces of this NTSN with the Persons with Reduced Mobility NTSN	8
2.4. Interfaces of this NTSN with the Safety in Railway Tunnels NTSN.....	9
2.5. Relation to the safety management system	9
3. ESSENTIAL REQUIREMENTS.....	9
4. DESCRIPTION OF THE INFRASTRUCTURE SUBSYSTEM	13
4.1. Introduction.....	13
4.2. Functional and technical specifications of the infrastructure subsystem.....	14
4.2.1. NTSN Categories of Line	14
4.2.2. Basic parameters characterising the infrastructure subsystem.....	17
4.2.3. Line layout	20
4.2.4. Track parameters.....	22
4.2.5. Switches and crossings	26
4.2.6. Track resistance to applied loads	27
4.2.7. Structures resistance to traffic loads.....	28
4.2.8. Immediate action limits on track geometry defects	31
4.2.9. Platforms	34
4.2.10. Health, safety and environment.....	35
4.2.11. Provision for operation.....	36
4.2.12. Fixed installations for servicing trains	37

4.3.	Functional and technical specification of the interfaces.....	38
4.3.1.	Interfaces with the rolling stock subsystem.....	39
4.3.2.	Interfaces with the energy subsystem	42
4.3.3.	Interfaces with the control command and signalling subsystem.....	42
4.3.4.	Interfaces with the operation and traffic management subsystem	43
4.4.	Operating rules	43
4.5.	Maintenance rules.....	44
4.5.1.	Maintenance file.....	44
4.5.2.	Maintenance plan.....	44
4.6.	Professional qualifications.....	44
4.7.	Health and safety conditions.....	45
5.	INTEROPERABILITY CONSTITUENTS	45
5.1.	Basis on which interoperability constituents have been selected	45
5.2.	List of constituents	45
5.3.	Constituents performances and specifications	46
5.3.1.	The rail	46
5.3.2.	The rail fastening systems	46
5.3.3.	Track sleepers	47
6.	ASSESSMENT OF CONFORMITY OF INTEROPERABILITY CONSTITUENTS AND UK VERIFICATION OF THE SUBSYSTEMS	47
6.1.	Interoperability Constituents	47
6.1.1.	Conformity assessment procedures.....	47
6.1.2.	Application of modules as set out in the Modules NTSN.....	48
6.1.3.	Innovative solutions for interoperability constituents.....	49
6.1.4.	UK declaration of conformity for interoperability constituents	49
6.1.5.	Particular assessment procedures for interoperability constituents.....	50
6.2.	Infrastructure subsystem.....	50
6.2.1.	General provisions.....	50
6.2.2.	Application of modules.....	51
6.2.3.	Innovative solutions	51

6.2.4.	Particular assessment procedures for infrastructure subsystem	52
6.2.5.	Technical solutions giving presumption of conformity at design stage.....	56
6.3.	UK Verification when speed is used as a migration criterion.....	58
6.4.	Assessment of maintenance file.....	58
6.5.	Subsystems containing Interoperability constituents not holding an UK declaration.....	58
6.5.1.	Conditions.....	59
6.5.2.	Documentation.....	59
6.5.3.	Maintenance of the subsystems certified according to 6.5.1.....	60
6.6.	Subsystem containing serviceable interoperability constituents that are suitable for reuse	60
6.6.1.	Conditions.....	60
6.6.2.	Documentation.....	61
6.6.3.	Use of serviceable interoperability constituents in maintenance	61
7.	IMPLEMENTATION OF THE INFRASTRUCTURE NTSN	62
7.1.	Application of this NTSN to railway lines	62
7.2.	Application of this NTSN to new railway lines.....	62
7.3.	Application of this NTSN to existing railway lines	63
7.3.1.	Upgrading of a line	63
7.3.2.	<i>This provision has been left intentionally blank</i>	<i>65</i>
7.3.3.	Substitution in the framework of maintenance	65
7.3.4.	Existing lines that are not subject to a renewal or upgrading project	66
7.4.	Application of this NTSN to existing platforms	67
7.5.	Speed as an implementation criterion	67
7.6.	<i>This provision has been left intentionally blank</i>	<i>67</i>
7.7.	UK Specific cases.....	67
7.7.1.	<i>This provision has been left intentionally blank</i>	<i>68</i>
7.7.2.	<i>This provision has been left intentionally blank</i>	<i>68</i>
7.7.3.	<i>This provision has been left intentionally blank</i>	<i>68</i>
7.7.4.	<i>This provision has been left intentionally blank</i>	<i>68</i>
7.7.5.	<i>This provision has been left intentionally blank</i>	<i>68</i>

7.7.6.	<i>This provision has been left intentionally blank</i>	68
7.7.7.	<i>This provision has been left intentionally blank</i>	68
7.7.8.	<i>This provision has been left intentionally blank</i>	68
7.7.9.	<i>This provision has been left intentionally blank</i>	68
7.7.10.	<i>This provision has been left intentionally blank</i>	68
7.7.11.	<i>This provision has been left intentionally blank</i>	68
7.7.12.	<i>This provision has been left intentionally blank</i>	68
7.7.13.	<i>This provision has been left intentionally blank</i>	68
7.7.14.	<i>This provision has been left intentionally blank</i>	68
7.7.15.	<i>This provision has been left intentionally blank</i>	68
7.7.16.	<i>This provision has been left intentionally blank</i>	68
7.7.17.	Particular features on the network for Great Britain	69
Appendix A	Assessment of interoperability constituents	73
Appendix B	Assessment of the infrastructure subsystem	73
Appendix C	Technical characteristics of track design and switches and crossings design	76
Appendix D	Conditions of use of track design and switches and crossings design	79
Appendix E	Capability requirements for structures according to traffic code	79
Appendix F	Capability requirements for structures according to traffic codes in Great Britain	86
Appendix G	Speed conversion to miles per hour for Great Britain	88
Appendix H	<i>This Appendix has been left intentionally blank.</i>	89
Appendix I	Reverse curves with radii in the range from 150 m up to 300 m	89
Appendix J	Safety assurance over fixed obtuse crossings	91
Appendix K	Basis of minimum requirements for structures for passenger coaches and multiple units	95
Appendix L	<i>Deleted</i>	97

Appendix M	<i>This Appendix has been left intentionally blank.</i> 97
Appendix N	<i>This Appendix has been left intentionally blank.</i> 97
Appendix O	<i>This Appendix has been left intentionally blank.</i> 97
Appendix P	<i>This Appendix has been left intentionally blank.</i> 97
Appendix Q	National technical rules for UK Specific Cases 97
Appendix R	List of open points 98
Appendix S	Glossary 99
Appendix T	List of referenced standards 106

1. INTRODUCTION

1.1. TECHNICAL SCOPE

This NTSN concerns the infrastructure subsystem and part of the maintenance subsystem of the GB rail system.

The infrastructure and the maintenance subsystems are defined respectively in ~~paragraphs~~[sections](#) 2.1 and 2.8 of Schedule 3 to the Railways (Interoperability) Regulations 2011.

The technical scope of this NTSN is further defined in Article 2(1), 2(5) and 2(6) of this NTSN.

1.2. GEOGRAPHICAL SCOPE

The geographical scope of this NTSN is defined in Article 2(4) of this NTSN.

1.3. *This provision has been left intentionally blank*

2. DEFINITION AND SCOPE OF SUBSYSTEM

2.1. DEFINITION OF THE INFRASTRUCTURE SUBSYSTEM

This NTSN covers:

- (a) the infrastructure structural subsystem
- (b) the part of the maintenance functional subsystem relating to the infrastructure subsystem (that is: washing plants for external cleaning of trains, water restocking, refuelling, fixed installations for toilet discharge and electrical shore supplies).

The elements of the infrastructure subsystem are described in ~~paragraph~~[section](#) 2.1 of Schedule 3 to the Railways (Interoperability) Regulations 2011.

The elements of the maintenance subsystem are described in ~~paragraph~~[section](#) 2.8 of Schedule 3 to the Railways (Interoperability) Regulations 2011.

The scope of this NTSN therefore includes the following aspects of the infrastructure subsystem:

- (a) Line layout,

- (b) Track parameters,
- (c) Switches and crossings,
- (d) Track resistance to applied loads,
- (e) Structures resistance to traffic loads,
- (f) Immediate action limits on track geometry defects,
- (g) Platforms,
- (h) Health, safety and environment,
- (i) Provision for operation,
- (j) Fixed installations for servicing trains.

Further details are set out in [point clause 4.2.2](#) of this NTSN.

2.2. INTERFACES OF THIS NTSN WITH OTHER NTSNS

Point 4.3 of this NTSN sets out the functional and technical specification of the interfaces with the following subsystems, as defined in the relevant NTSNs:

- (a) Rolling stock subsystem,
- (b) Energy subsystem,
- (c) Control command and signalling subsystem,
- (d) Traffic operation and management subsystem.

Interfaces with the Persons with Reduced Mobility NTSN (PRM NTSN) are described in [point section 2.3](#) below.

Interfaces with the Safety in Railway Tunnels NTSN (SRT NTSN) are described in [point section 2.4](#) below.

2.3. INTERFACES OF THIS NTSN WITH THE PERSONS WITH REDUCED MOBILITY NTSN

All requirements relating to the infrastructure subsystem for the access of persons with reduced mobility to the railway system are set out in the Persons with Reduced Mobility NTSN.

2.4. INTERFACES OF THIS NTSN WITH THE SAFETY IN RAILWAY TUNNELS NTSN

All requirements relating to the infrastructure subsystem for safety in railway tunnels are set out in the Safety in Railway Tunnels NTSN.

2.5. RELATION TO THE SAFETY MANAGEMENT SYSTEM

Necessary processes to manage safety according to the requirements in the scope of this NTSN, including interfaces to humans, organisations or other technical systems, shall be designed and implemented in the infrastructure manager's safety management system as required by the Railways and Other Guided Transport Systems (Safety) Regulations 2006.

2.6. RELATION TO THE CODIFICATION OF COMBINED TRANSPORT

- (1) The provisions for structure gauge are given in clause 4.2.3.1
- (2) The codification system used for the conveyance of intermodal loading units in combined transport can be based:
 - (a) on the characteristics of the line and the exact position of the obstacles,
 - (b) on the reference profile of the structure gauge of that line,
 - (c) or on a combination of both methods.

3. ESSENTIAL REQUIREMENTS

The following table indicates basic parameters of this NTSN and their correspondence to the essential requirements as set out and numbered in Schedule 2 to the Railways (Interoperability) Regulations 2011.

Table 1

Basic Parameters of the infrastructure subsystem corresponding to the essential requirements

NTSN point clause	Title of NTSN point clause	Safety	Reliability Availability	Health	Environmental protection	Technical compatibility	Accessibility
4.2.3.1	Structure gauge	1.1.1, 2.1.1				1.5	
4.2.3.2	Distance between track centres	1.1.1, 2.1.1				1.5	
4.2.3.3	Maximum gradients	1.1.1				1.5	
4.2.3.4	Minimum radius of horizontal curve	1.1.3				1.5	
4.2.3.5	Minimum radius of vertical curve	1.1.3				1.5	
4.2.4.1	Nominal track gauge					1.5	
4.2.4.2	Cant	1.1.1, 2.1.1				1.5	1.6.1
4.2.4.3	Cant deficiency	1.1.1				1.5	
4.2.4.4	Abrupt change of cant deficiency	2.1.1					
4.2.4.5	Equivalent conicity	1.1.1, 1.1.2				1.5	
4.2.4.6	Railhead profile for plain line	1.1.1, 1.1.2				1.5	
4.2.4.7	Rail inclination	1.1.1, 1.1.2				1.5	
4.2.5.1	Design geometry of switches and crossings	1.1.1, 1.1.2, 1.1.3				1.5	

NTSN point clause	Title of NTSN point clause	Safety	Reliability Availability	Health	Environmental protection	Technical compatibility	Accessibility
4.2.5.2	Use of swing nose crossings	1.1.2, 1.1.3					
4.2.5.3	Maximum unguided length of fixed obtuse crossings	1.1.1, 1.1.2				1.5	
4.2.6.1	Track resistance to vertical loads	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.6.2	Longitudinal track resistance	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.6.3	Lateral track resistance	1.1.1, 1.1.2, 1.1.3				1.5	
4.2.7.1	Resistance of new bridges to traffic loads	1.1.1, 1.1.3				1.5	
4.2.7.2	Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures	1.1.1, 1.1.3				1.5	
4.2.7.3	Resistance of new structures over or adjacent to tracks	1.1.1, 1.1.3				1.5	
4.2.7.4	Resistance of existing bridges and earthworks to traffic loads	1.1.1, 1.1.3				1.5	
4.2.8.1	The immediate action limit for alignment	1.1.1, 1.1.2	1.2				
4.2.8.2	The immediate action limit for longitudinal level	1.1.1, 1.1.2	1.2				
4.2.8.3	The immediate action limit for track twist	1.1.1, 1.1.2	1.2				

NTSN point clause	Title of NTSN point clause	Safety	Reliability Availability	Health	Environmental protection	Technical compatibility	Accessibility
4.2.8.4	The immediate action limit of track gauge as isolated defect	1.1.1, 1.1.2	1.2				
4.2.8.5	The immediate action limit for cant	1.1.1, 1.1.2	1.2				
4.2.8.6	The immediate action limit for switches and crossings	1.1.1, 1.1.2	1.2			1.5	
4.2.9.1	Usable length of platforms	1.1.1, 2.1.1				1.5	
4.2.9.2	Platform height	1.1.1, 2.1.1				1.5	1.6.1
4.2.9.3	Platform offset	1.1.1, 2.1.1				1.5	1.6.1
4.2.9.4	Track layout alongside platforms	1.1.1, 2.1.1				1.5	1.6.1
4.2.10.1	Maximum pressure variations in tunnels	1.1.1, 2.1.1				1.5	
4.2.10.2	Effect of cross winds	1.1.1, 2.1.1	1.2			1.5	
4.2.10.3	Aerodynamic effect on ballasted track	1.1.1	1.2			1.5	
4.2.11.1	Location markers	1.1.1	1.2				
4.2.11.2	Equivalent conicity in service	1.1.1, 1.1.2				1.5	
4.2.12.2	Toilet discharge	1.1.5	1.2	1.3.1		1.5	
4.2.12.3	Train external cleaning facilities		1.2			1.5	
4.2.12.4	Water restocking	1.1.5	1.2	1.3.1		1.5	

NTSN point clause	Title of NTSN point clause	Safety	Reliability Availability	Health	Environmental protection	Technical compatibility	Accessibility
4.2.12.5	Refuelling	1.1.5	1.2	1.3.1		1.5	
4.2.12.6	Electric shore supply	1.1.5	1.2			1.5	
4.4	Operating rules		1.2				
4.5	Maintenance rules		1.2				
4.6	Professional qualifications	1.1.5	1.2				
4.7	Health and safety conditions	1.1.5	1.2	1.3	1.4.1		

4. DESCRIPTION OF THE INFRASTRUCTURE SUBSYSTEM

4.1. INTRODUCTION

- (1) The GB rail system, of which the infrastructure and maintenance subsystems are parts, is an integrated system whose consistency needs to be verified. This consistency must be checked in particular with regard to the specifications of the infrastructure subsystem, its interfaces in relation to the other subsystems of the GB rail system in which it is integrated, as well as the operating and maintenance rules.
- (2) The limiting values set out in this NTSN are not intended to be imposed as usual design values. However the design values must be within the limits set out in this NTSN.
- (3) The functional and technical specifications of the infrastructure and part of the maintenance subsystems and their interfaces, as described in [points sections](#) 4.2 and 4.3, do not impose the use of specific technologies or technical solutions, except where this is strictly necessary for the safe and uninterrupted movement of trains which accomplish the required levels of performance for those lines.
- (4) Innovative solutions for interoperability which do not fulfil the requirements specified in this NTSN and/or which are not assessable as stated in this NTSN require new specifications and/or new assessment methods. The process for obtaining an exemption for innovative solutions is described in Article 10.

- (5) Where reference is made to EN standards, any variations called ‘national deviations’ in the EN do not apply, unless otherwise specified in this NTSN.
- (6) Where line speeds are stated in [km/h] as a category or performance parameter in this NTSN, it shall be allowed to translate the speed to equivalent [mph] as in Appendix G, for Great Britain networks.

4.2. FUNCTIONAL AND TECHNICAL SPECIFICATIONS OF THE INFRASTRUCTURE SUBSYSTEM

4.2.1. NTSN Categories of Line

- (1) *This provision has been left intentionally blank.*
- (2) The NTSN category of line shall be a combination of traffic codes. For lines where only one type of traffic is carried (for example, a freight only line), a single code may be used to describe the performances; where mixed traffic runs the category will be described by one or more codes for passenger and freight. The combined traffic codes describe the envelope within which the desired mix of traffic can be accommodated.
- (3) These NTSN categories of line shall be used for the classification of existing lines to define a target system so that the relevant performance parameters will be met.
- (4) ~~For the purpose of NTSN categorisation, lines are~~ shall be classified generically based on the type of traffic (traffic code) characterised by the following performance parameters:
 - gauge,
 - axle load,
 - line speed,
 - train length
 - usable length of platform.

The columns for ‘structure gauge’ and ‘axle load’ shall be treated as minimum target levels for infrastructure requirements as they directly control the trains that may run. The columns for ‘line speed’, ‘usable length of platform’ and ‘train length’ are indicative of the range of values that are typically applied for different traffic types and they do not directly impose restrictions on the traffic that may run over the line.

- (5) The performance parameters listed in Table 2 and Table 3 are not intended to be used ~~to directly ascertain the~~for compatibility checks between rolling stock and infrastructure as described in clause 4.2.2.5 and Appendix D1 of the OPE NTSN.
- (6) The column for axle load by itself is not sufficient to define the requirements for infrastructure. Information defining minimum capability requirements for existing structures in relationship to different train types is given in Appendix E. For the United Kingdom of Great Britain and Northern Ireland networks, ~~i~~Information defining the relation between maximum axle load and maximum speed according to type of vehicle is given in Appendix E and Appendix F.
- (7) The performance levels for types of traffic are set out in Table 2 and Table 3 here-under.

Table 2

Performance parameters for passenger traffic infrastructure

– not to be used for compatibility checks between rolling stock and infrastructure as described in clause 4.2.2.5 and Appendix D1 of the OPE NTSN –

Traffic code	<u>Structure</u> G auge	Axle load [t]	Line speed [km/h]	Usable length of platform [m]
P1	GC	17 (*) / <u>21.5</u> (**)	250-350	400
P2	GB	20 (*) / <u>22.5</u> (**)	200-250	200-400
P3	DE3	22,5 (***)	120-200	200-400
P4	GB	22,5 (***)	120-200	200-400
P5	GA	20 (***)	80-120	50-200
P6	G1	12 (***)	n.a.	n.a.
P1520	S	22,5 (***)	80-160	35-400
P1600	IRL1	22,5 (***)	80-160	75-240

(*) Minimum required values of axle load to be used for dynamic checks of bridges. Axle load is based on design mass in working order for power heads and locomotives and operational mass under normal payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions according to the specification referenced in Appendix T index [1] as defined in point 2.1 of EN 15663:2009+AC:2010 and design mass under normal payload for other vehicles in accordance with point 6.3 of EN15663:2009+AC:2010.

(**) Minimum required values of axle load to be used for static checks of infrastructure, based on design mass under exceptional payload for vehicles capable of carrying a payload of passengers or luggage (mass definitions

[according to the specification referenced in Appendix T index \[1\] with regard of the specification referenced in Appendix T index \[2\]. This axle load may be linked to limited speed.](#)

(**) [To be used for static checks of infrastructure, Axle load is](#) based on design mass in working order for power heads and locomotives [as defined in point 2.1 of EN 15663:2009+AC:2010](#) and design mass under exceptional payload for other vehicles [\(mass definitions according to the specification referenced in Appendix T index \[1\] with regard of the specification referenced in Appendix T index \[2\]. This axle load may be linked to limited speed](#) [as defined in Appendix K to this NTSN.](#)

Table 3

Performance parameters for freight traffic [infrastructure](#)

[– not to be used for compatibility checks between rolling stock and infrastructure as described in clause 4.2.2.5 and Appendix D1 of the OPE NTSN –](#)

Traffic code	Gauge	Axle load [t]	Line speed [km/h]	Train length [m]
F1	GC	22,5 (*)	100-120	740-1050
F2	GB	22,5 (*)	100-120	600-1050
F3	GA	20 (*)	60-100	500-1050
F4	G1	18 (*)	n.a.	n.a.
F1520	S	25 (*)	50-120	1050
F1600	IRL1	22,5 (*)	50-100	150-450

(*) [To be used for static checks of infrastructure, Axle load is](#) based on design mass in working order for power heads and locomotives [as defined in point 2.1 of EN 15663:2009+AC:2010](#) and design mass under exceptional payload for other vehicles [as defined in Appendix K to this NTSN \(mass definitions according to the specification referenced in Appendix T index \[1\]. This axle load may be linked to limited speed.](#)

- (8) For structures, axle load by itself is not sufficient to define the requirements for infrastructure. Requirements are specified for new structures in ~~point~~ [clauses 4.2.7.1.1 and 4.2.7.2](#), and for existing structures in ~~point~~ [clause 4.2.7.4 and for track in clause 4.2.6](#).
- (9) Passenger hubs, freight hubs and connecting lines are included in the above traffic codes, as appropriate.
- (10) *This provision has been left intentionally blank*
- (11) Without prejudice to Section 7.6 and point 4.2.7.1.2_(3), when categorising a new line as P1, it shall be ensured that ‘Class I’ trains, according to the HS RST TSI (Commission Decision 2008/232/EC), for a speed greater than 250 km/h, can run on that line up to the maximum speed.

- (12) It is permissible for specific locations on the line to be designed for any or all of the performance parameters line speed, usable length of platform and train length less than those set out in Table 2 and Table 3, where duly justified to meet geographical, urban or environmental constraints.

4.2.2. Basic parameters characterising the infrastructure subsystem

4.2.2.1. List of Basic Parameters

The Basic Parameters characterising the infrastructure subsystem, grouped according to the aspects listed in [point section 2.1](#), are:

A. Line layout:

- (a) Structure gauge (4.2.3.1),
- (b) Distance between track centres (4.2.3.2),
- (c) Maximum gradients (4.2.3.3),
- (d) Minimum radius of horizontal curve (4.2.3.4),
- (e) Minimum radius of vertical curve (4.2.3.5),

B. Track parameters:

- (a) Nominal track gauge (4.2.4.1),
- (b) Cant (4.2.4.2),
- (c) Cant deficiency (4.2.4.3),
- (d) Abrupt change of cant deficiency (4.2.4.4),
- (e) Equivalent conicity (4.2.4.5),
- (f) Railhead profile for plain line (4.2.4.6),
- (g) Rail inclination (4.2.4.7),

C. Switches and crossings

- (a) Design geometry of switches and crossings (4.2.5.1),
- (b) Use of swing nose crossings (4.2.5.2),
- (c) Maximum unguided length of fixed obtuse crossings (4.2.5.3),

D. Track resistance to applied loads

- (a) Track resistance to vertical loads (4.2.6.1),
- (b) Longitudinal track resistance (4.2.6.2),
- (c) Lateral track resistance (4.2.6.3),

E. Structures resistance to traffic loads

- (a) Resistance of new bridges to traffic loads (4.2.7.1),
- (b) Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures (4.2.7.2),
- (c) Resistance of new structures over or adjacent to tracks (4.2.7.3),
- (d) Resistance of existing bridges and earthworks to traffic loads (4.2.7.4),

F. Immediate action limits on track geometry defects

- (a) The immediate action limit for alignment (4.2.8.1),
- (b) The immediate action limit for longitudinal level (4.2.8.2),
- (c) The immediate action limit for track twist (4.2.8.3),
- (d) The immediate action limit of track gauge as isolated defect (4.2.8.4),
- (e) The immediate action limit for cant (4.2.8.5),
- (f) The immediate action limits for switches and crossings (4.2.8.6),

G. Platforms

- (a) Usable length of platforms (4.2.9.1),
- (b) Platform height (4.2.9.2),
- (c) Platform offset (4.2.9.3),
- (d) Track layout alongside platforms (4.2.9.4),

H. Health, safety and environment

- (a) Maximum pressure variation in tunnels (4.2.10.1),
- (b) Effect of crosswinds (4.2.10.2),
- (c) Aerodynamic effect on ballasted track (4.2.10.3)

I. Provision for operation

- (a) Location markers (4.2.11.1),
- (b) Equivalent conicity in service (4.2.11.2)

J. Fixed installations for servicing trains

- (a) General (4.2.12.1),
- (b) Toilet discharge (4.2.12.2),
- (c) Train external cleaning facilities (4.2.12.3),
- (d) Water restocking (4.2.12.4),
- (e) Refuelling (4.2.12.5),
- (f) Electric shore supply (4.2.12.6),

K. Maintenance rules

- (a) Maintenance plan (4.5.2).

4.2.2.2. Requirements for Basic Parameters

- (1) These requirements are described in the following paragraphs, together with any particular conditions that may be allowed in each case for the basic parameters and interfaces concerned.
- (2) The values of basic parameters specified are only valid up to a maximum line speed of 350 km/h.
- (3) *This provision has been left intentionally blank*
- (4) In case of multi-rail track, requirements of this NTSN are to be applied separately to each pair of rails designed to be operated as separate track.
- (5) Requirements for lines representing specific cases are described under ~~point~~ [section 7.7](#).
- (6) A short section of track with devices to allow transition between different nominal track gauges is allowed.
- (7) Requirements are described for the subsystem under normal service conditions. Consequences, if any, of the execution of works, which may require temporary exceptions as far as the subsystem performance is concerned, are dealt with in ~~point~~ [section 4.4](#).

- (8) The performance levels of trains can be enhanced by adopting specific systems, such as vehicle body tilting. Special conditions are allowed for running such trains, provided they do not entail restrictions for other trains not equipped with such systems.

4.2.3. Line layout

4.2.3.1. Structure gauge

- (1) The upper part of the structure gauge shall be set on the basis of the gauges selected according to ~~point~~clause 4.2.1. Those gauges are defined in the specification referenced in Appendix T index [3]~~Annex C and in Annex D, point D.4.8 of EN 15273-3:2013.~~
- (2) The lower part of the structure gauge shall be GI2 as defined in the specification referenced in Appendix T index [3]~~Annex C of EN 15273-3:2013.~~ Where tracks are equipped with rail brakes, structure gauge GI1 as defined in the same specification~~Annex C of EN 15273-3:2013~~ shall apply for the lower part of the gauge.
- (3) Calculations of the structure gauge shall be done using the kinematic method in accordance with the requirements of the specification referenced in Appendix T index [3]~~sections 5, 7, 10 and the Annex C and Annex D, point D.4.8 of EN 15273-3:2013.~~

4.2.3.2. Distance between track centres

- (1) The distance between track centres shall be set on the basis of the gauges selected according to ~~point~~clause 4.2.1.
- (2) The nominal horizontal distance between track centres for new lines shall be specified for the design and shall not be smaller than the values from the Table 4; it considers margins for aerodynamic effects.

Table 4

Minimum nominal horizontal distance between track centres

Maximum allowed speed [km/h]	Minimum nominal horizontal distance between track centres [m]
$160 < v \leq 200$	3,80
$200 < v \leq 250$	4,00
$250 < v \leq 300$	4,20
$v > 300$	4,50

- (3) The distance between track centres shall at least satisfy the requirements for the limit installation distance between track centres, defined according [to the specification referenced in Appendix T, index \[3\]](#) ~~section 9 of EN 15273-3:2013.~~

4.2.3.3. Maximum gradients

- (1) Gradients of tracks through passenger platforms of new lines shall not be more than 2,5 mm/m, where vehicles are intended to be regularly attached or detached.
- (2) Gradients of new stabling tracks intended for parking rolling stock shall not be more than 2,5 mm/m unless specific provision is made to prevent the rolling stock from running away.
- (3) Gradients as steep as 35 mm/m are allowed for main tracks on new P1 lines dedicated to passenger traffic at the design phase provided the following ‘envelope’ requirements are observed:
- (a) the slope of the moving average profile over 10 km is less than or equal to 25 mm/m.
 - (b) the maximum length of continuous 35 mm/m gradient does not exceed 6 km.

4.2.3.4. Minimum radius of horizontal curve

The minimum design radius of horizontal curve shall be selected with regard to the local design speed of the curve.

- (1) The minimum horizontal design curve radius for new lines shall not be less than 150 m.

- (2) Reverse curves (~~other than~~ except in marshalling yards where wagons are shunted individually) with small radii ~~radii in the range from 150 m up to 300 m~~ for new lines shall be designed to prevent buffer locking. For straight intermediate track elements between the curves, the specification referenced in Appendix T, index [4] ~~Table 43 and Table 44 of Appendix I~~ shall apply, whose values are based on the reference vehicles defined in the same specification. To prevent buffer locking for existing vehicles that do not fulfil the assumptions of the reference vehicles, it can be necessary to specify more restrictive, longer lengths of the straight intermediate element. For example, the generic lower limits can be required as lower limits for dedicated freight lines. For non-straight intermediate track elements, a detailed calculation shall be made in order to check the magnitude of the end throw differences.

4.2.3.5. **Minimum radius of vertical curve**

- (1) The radius of vertical curves (except for humps in marshalling yards) shall be at least 500 m on a crest or 900 m in a hollow.
- (2) For humps in marshalling yards the radius of vertical curves shall be at least 250 m on a crest or 300 m in a hollow.

4.2.4. **Track parameters**

4.2.4.1. **Nominal track gauge**

- (1) The UK track gauge shall be the European standard nominal track gauge of 1 435 mm.

4.2.4.2. **Cant**

- (1) The design cant for lines shall be limited as defined in Table 7.

Table 7

Design cant [mm]

	Freight and mixed traffic	Passenger traffic
Ballasted track	160	180
Non ballasted track	170	180

- (2) The design cant on tracks adjacent to station platforms where trains are intended to stop in normal service shall not exceed 110 mm.

- (3) New lines with mixed or freight traffic on curves with a radius less than 305 m and a cant transition steeper than 1 mm/m, the cant shall be restricted to the limit given by the following formula

$$D \leq (R - 50)/1,5$$

where D is the cant in mm and R is the radius in m.

4.2.4.3. **Cant deficiency**

- (1) The maximum values for cant deficiency are set out in Table 8.

Table 8

Maximum cant deficiency [mm]

Design speed [km/h]	$v \leq 160$	$160 < v \leq 300$	$v > 300$
For operation of rolling stock conforming to the Locomotives and Passenger TSI or NTSN that replaces and/or substantially reproduces it	153		100
For operation of rolling stock conforming to the Freight Wagons TSI or NTSN that replaces and/or substantially reproduces it	130	—	—

- (2) It is permissible for trains specifically designed to travel with higher cant deficiency (for example multiple units with axle loads lower than set out in table 2; vehicles with special equipment for the negotiation of curves) to run with higher cant deficiency values, subject to a demonstration that this can be achieved safely.

4.2.4.4. **Abrupt change of cant deficiency**

- (1) The maximum values of abrupt change of cant deficiency shall be:
- (a) 130 mm for $v \leq 60$ km/h,
 - (b) 125 mm for $60 \text{ km/h} < v \leq 200$ km/h,
 - (c) 85 mm for $200 \text{ km/h} < v \leq 230$ km/h
 - (d) 25 mm for $v > 230$ km/h.
- (2) Where $v \leq 40$ km/h and cant deficiency ≤ 75 mm both before and after an abrupt change of curvature, the value of abrupt change of cant deficiency may be raised to 150 mm.

4.2.4.5. Equivalent conicity

- (1) The limiting values for equivalent conicity quoted in Table 10 shall be calculated for the amplitude (y) of the wheelset's lateral displacement:

$$- y = 3 \text{ mm,} \quad \text{if } (TG - SR) \geq 7\text{mm}$$

$$- y = \left(\frac{(TG - SR) - 1}{2} \right), \quad \text{if } 5\text{mm} \leq (TG - SR) < 7\text{mm}$$

$$- y = 2 \text{ mm,} \quad \text{if } (TG - SR) < 5\text{mm}$$

where TG is the track gauge and SR is the distance between the flange contact faces of the wheelset

- (2) No assessment of equivalent conicity is required for switches and crossings.
- (3) Design track gauge, rail head profile and rail inclination for plain line shall be selected to ensure that the equivalent conicity limits set out in Table 10 are not exceeded.

Table 10

Equivalent conicity design limit values

	Wheel profile
Speed range [km/h]	S1002, GV1/40
$v \leq 60$	Assessment not required
$60 < v \leq 200$	0,25
$200 < v \leq 280$	0,20
$v > 280$	0,10

- (4) The following wheelsets, [as defined in the specification referenced in Appendix T, index \[6\]](#), shall be modelled passing over the designed track conditions (simulated by calculation according to [the specification referenced in Appendix T, index \[5\]](#) ~~EN 15302:2008+A1:2010~~):
- (a) S 1002 ~~as defined in Annex C of EN 13715:2006+A1:2010~~ with SR1.
 - (b) S 1002 ~~as defined in Annex C of EN 13715:2006+A1:2010~~ with SR2.
 - (c) GV 1/40 ~~as defined in Annex B of EN 13715:2006+A1:2010~~ with SR1.
 - (d) GV 1/40 ~~as defined in Annex B of EN 13715:2006+A1:2010~~ with SR2.

For SR1 and SR2 the following values apply:


- (a) For the 1 435 mm track gauge system SR1 = 1 420 mm and SR2 = 1 426 mm.

4.2.4.6. Railhead profile for plain line

- (1) The railhead profile shall be selected from the range set out in [one of the specifications referenced in Appendix T, index \[7\], index \[8\]](#) ~~Annex A of EN 13674-1:2011, Annex A of EN13674-4:2006+A1:2009~~ or shall be in accordance with as defined in point [\(2\)](#).
- (2) The design of railhead profiles for plain line shall comprise:
 - (a) a lateral slope on the side of the railhead angled to between vertical and 1/16 with reference to the vertical axis of the railhead;
 - (b) the vertical distance between the top of this lateral slope and the top of the rail shall be less than 20 mm;
 - (c) a radius of at least 12 mm at the gauge corner;
 - (d) the horizontal distance between the crown of the rail and the tangent point shall be between 31 and 37,5 mm.

Figure 1

Railhead profile

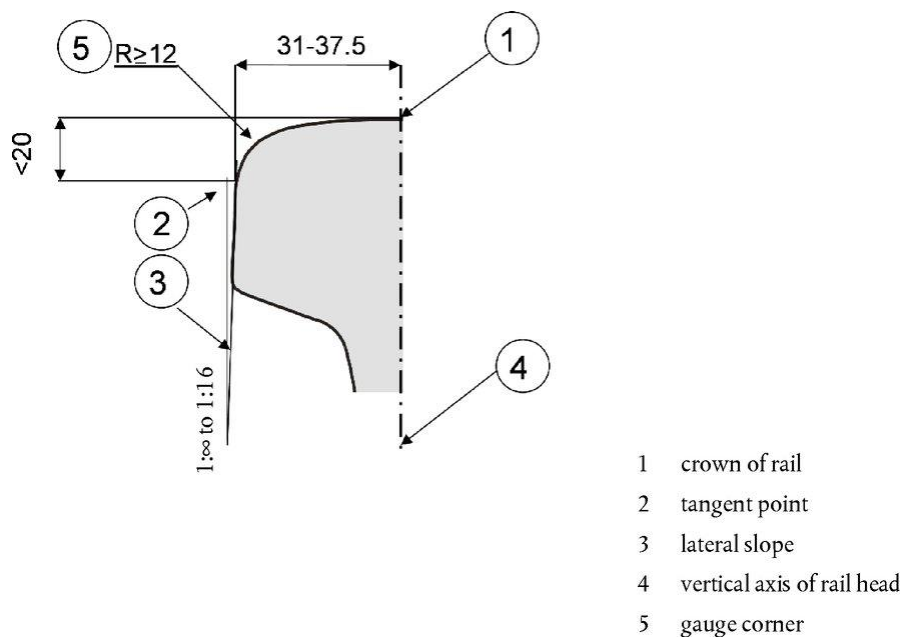

- (3) These requirements are not applicable to expansion devices.

4.2.4.7. Rail inclination

4.2.4.7.1. Plain line

- (1) The rail shall be inclined towards the centre of the track.
- (2) For tracks intended to be operated at speeds greater than 60 km/h, the rail inclination for a given route shall be selected from the range 1/20 to 1/40.
- (3) For sections of not more than 100 m between switches and crossings without inclination where the running speed is no more than 200 km/h, the laying of rails without inclination is allowed.

4.2.4.7.2. Requirements for switches and crossings

- (1) The rail shall be designed to be either vertical or inclined.
- (2) If the rail is inclined, the designed inclination shall be selected from the range 1/20 to 1/40.
- (3) The inclination can be given by the shape of the active part of the rail head profile.
- (4) Within switches and crossings where the running speed is more than 200 km/h and no more than 250 km/h, the laying of rails without inclination is allowed provided that it is limited to sections not exceeding 50 m.
- (5) For speeds of more than 250 km/h the rails shall be inclined.

4.2.5. Switches and crossings

4.2.5.1. Design geometry of switches and crossings

~~Point~~ [Clause](#) 4.2.8.6 of this NTSN defines immediate action limits for switches and crossings that are compatible with geometrical characteristics of wheelsets as defined in the rolling stock NTSNs. It will be the task of the infrastructure manager to decide geometrical design values appropriate to its maintenance plan.

4.2.5.2. Use of swing nose crossing

For speeds higher than 250 km/h switches and crossings shall be equipped with swing-nose crossings.

4.2.5.3. Maximum unguided length of fixed obtuse crossings

The design value of the maximum unguided length of fixed obtuse crossings shall be in accordance with the requirements set out in Appendix J to this NTSN.

4.2.6. Track resistance to applied loads

4.2.6.1. Track resistance to vertical loads

The track design, including switches and crossings, shall take into account at least the following forces:

- (a) the axle load selected according to ~~point~~[clause](#) 4.2.1;
- (b) maximum vertical wheel forces. Maximum wheel forces for defined test conditions are defined in [the specification referenced in Appendix T, index \[9\] EN 14363:2005 point 5.3.2.3.](#)
- (c) vertical quasi-static wheel forces. Maximum quasi-static wheel forces for defined test conditions are defined in [the specification referenced in Appendix T, index \[9\] EN 14363:2005 points 5.3.2.3.](#)

4.2.6.2. Longitudinal track resistance

4.2.6.2.1. Design forces

The track, including switches and crossings, shall be designed to withstand longitudinal forces equivalent to the force arising from braking of 2,5 m/s² for the performance parameters chosen in accordance with ~~point~~[clause](#) 4.2.1.

4.2.6.2.2. Compatibility with braking systems

- (1) The track, including switches and crossings, shall be designed to be compatible with the use of magnetic braking systems for emergency braking.
- (2) Provisions for the use of eddy current braking systems on track shall be defined at operational level by the infrastructure manager on the basis of the specific characteristics of the track, including switches and crossings. The conditions of use of this braking system are registered in accordance with Commission Implementing Regulation (EU) 2019/777¹ (RINF).

¹ Commission Implementing Regulation (EU) 2019/777 of 16 May 2019 on the common specifications for the register of railway infrastructure and repealing Implementing Decision 2014/880/EU. This EU legislation is retained EU law under section 3 of the European Union (Withdrawal) Act 2018.

4.2.6.3. **Lateral track resistance**

The track design, including switches and crossings, shall take into account at least the following forces:

- (a) lateral forces; Maximum lateral forces exerted by a wheel set on the track for defined test conditions are defined in [the specification referenced in Appendix T, index \[9\]](#)~~EN 14363:2005 point 5.3.2.2.~~
- (b) quasi-static guiding forces; Maximum quasi-static guiding forces Y_{qst} for defined radii and test conditions are defined in [the specification referenced in Appendix T, index \[9\]](#)~~EN 14363:2005 point 5.3.2.3.~~

4.2.7. **Structures resistance to traffic loads**

The requirements of [the specifications referenced in Appendix T, index \[10\] and index \[11\]](#) ~~EN 1991-2:2003/AC:2010 and Annex A2 to EN 1990:2002 issued as EN 1990:2002/A1:2005~~ specified in this section of the NTSN are to be applied in accordance with the corresponding points in the national annexes to these standards if they exist.

4.2.7.1. **Resistance of new bridges to traffic loads**

4.2.7.1.1. **Vertical loads**

- (1) ~~Structures-Bridges~~ shall be designed to support vertical loads in accordance with the following load models, defined in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010~~:
 - (a) Load Model 71, as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 point 6.3.2 (2)P~~
 - (b) In addition, for continuous bridges, Load Model SW/0, as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 point 6.3.3 (3)P~~
- (2) The load models shall be multiplied by the factor alpha (~~α~~) as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 points 6.3.2 (3)P and 6.3.3 (5)P~~.
- (3) The value of factor alpha (~~α~~) shall be equal to or greater than the values set out in Table 11.

Table 11

Factor alpha (α) for the design of new ~~structures~~bridges

Type of traffic	Minimum factor alpha (α)
P1, P2, P3, P4	1,0
P5	0,91
P6	0,83
P1520	1
P1600	1,1
F1, F2, F3	1,0
F4	0,91
F1520	1,46
F1600	1,1

4.2.7.1.2. Allowance for dynamic effects of vertical loads

- (1) The load effects from the Load Model 71 and Load Model SW/0 shall be enhanced by the dynamic factor phi (Φ) as set out in [the specification referenced in Appendix T, index \[10\]](#) ~~EN 1991-2:2003/AC:2010 points 6.4.3 (1)P and 6.4.5.2 (2).~~
- (2) For bridges for speeds over 200 km/h where [the specification referenced in Appendix T, index \[10\]](#) ~~EN 1991-2:2003/AC:2010 paragraph 6.4.4~~ requires a dynamic analysis to be carried out the ~~structure-bridge~~ shall additionally be designed for HSLM defined in [the specification referenced in Appendix T, index \[10\]](#) ~~EN 1991-2:2003/AC:2010 paragraphs 6.4.6.1.1 (3) to (6) inclusive.~~
- (3) It is permissible to design new bridges such that they will also accommodate an individual passenger train with higher axle loads than covered by HSLM. The dynamic analysis shall be undertaken using the characteristic value of the loading from the individual train taken as the design mass under normal payload in accordance with Appendix K with an allowance for passengers in standing areas in accordance with Note 1 of Appendix K.

4.2.7.1.3. Centrifugal forces

Where the track on a bridge is curved over the whole or part of the length of the bridge, the centrifugal force shall be taken into account in the design of ~~structures~~bridges as set out in [the specification referenced in Appendix T, index \[10\]](#) ~~EN 1991-2:2003/AC:2010 paragraphs 6.5.1 (2), (4)P and (7).~~

4.2.7.1.4. Nosing forces

The nosing force shall be taken into account in the design of [structuresbridges](#) as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 point 6.5.2.~~

4.2.7.1.5. Actions due to traction and braking (longitudinal loads)

Traction and braking forces shall be taken into account in the design of [structuresbridges](#) as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 paragraphs 6.5.3 (2)P, (4), (5), (6) and (7)P.~~

4.2.7.1.6. Design track twist due to rail traffic actions

The maximum total design track twist due to rail traffic actions shall not exceed the values set out in [the specification referenced in Appendix T, index \[11\]](#)~~paragraph A2.4.4.2.2(3)P in Annex A2 to EN 1990:2002 issued as EN 1990:2002/A1:2005.~~

4.2.7.2. *Equivalent vertical loading for new [geotechnical structures](#), earthworks and earth pressure effects*

- (1) [Geotechnical structures and Earthworks](#) shall be designed and earth pressure effects shall be specified taking into account the vertical loads produced by the Load Model 71, as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 paragraph 6.3.2(2).~~
- (2) The equivalent vertical loading shall be multiplied by the factor alpha (α) as set out in [the specification referenced in Appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 paragraph 6.3.2 (3)P.~~ The value of α shall be equal to or greater than the values set out in Table 11.

4.2.7.3. *Resistance of new structures over or adjacent to tracks*

Aerodynamic actions from passing trains shall be taken into account as set out in [the specification referenced in appendix T, index \[10\]](#)~~EN 1991-2:2003/AC:2010 paragraphs 6.6.2 to 6.6.6 inclusive.~~

4.2.7.4. *Resistance of existing bridges and earthworks to traffic loads*

- (1) Bridges and earthworks shall be brought to a specified level of interoperability according to the NTSN category of line as defined in ~~point~~ [clause 4.2.1.](#)
- (2) The minimum capability requirements for structures for each traffic code are given in Appendix E. The values represent the minimum target level that structures must be capable of for the line to be declared interoperable.

- (3) The following cases are relevant:
- (a) Where an existing structure is replaced by a new structure then the new structure shall be in accordance with the requirements of ~~point~~ [clause 4.2.7.1](#) or ~~point~~ [clause 4.2.7.2](#).
 - (b) If the minimum capability of the existing structures ~~expressed by the published EN line category in combination with the allowed speed~~ satisfies the requirements in Appendix E then the existing structures satisfy the relevant interoperability requirements.
 - (c) Where the capability of an existing structure does not satisfy the requirements in Appendix E and works (e.g. strengthening) are being carried out to raise the capability of the structure to meet the requirements of this NTSN (and the structure is not to be replaced by a new structure) then the structure shall be brought into conformity with the requirements in Appendix E.
- (4) For the Great Britain networks, in ~~paragraphs~~ [points](#) (2) and (3) above the EN line category may be replaced by Route Availability (RA) number (delivered in accordance with the national technical rule) and consequently reference to Appendix E are replaced by reference to Appendix F.

4.2.8. Immediate action limits on track geometry defects

4.2.8.1. *The immediate action limit for alignment*

- (1) The immediate action limits for isolated defects in alignment are set out in [the specification referenced in Appendix T, index \[12\]](#) ~~point 8.5 of EN 13848-5:2008+A1:2010~~. Isolated defects shall not exceed the limits of wavelength range D1. ~~as set out in Table 6 of the EN Standard~~
- (2) The immediate action limits for isolated defects in alignment for speeds of more than 300 km/h are an open point.

4.2.8.2. *The immediate action limit for longitudinal level*

- (1) The immediate action limits for isolated defects in longitudinal level are set out in [the specification referenced in Appendix T, index \[12\]](#) ~~point 8.3 of EN 13848-5:2008+A1:2010~~. Isolated defects shall not exceed the limits of wavelength range D1. ~~as set out in table 5 of the EN Standard~~
- (2) The immediate action limits for isolated defects in longitudinal level for speeds of more than 300 km/h are an open point.

4.2.8.3. **The immediate action limit for track twist**

- (1) The immediate action limit for track twist as an isolated defect is given as a zero to peak value. Track twist is defined in [the specification referenced in Appendix T, index \[13\]](#) ~~EN 13848-1:2003+A1:2008 point 4.6.~~
- (2) The track twist limit is a function of the measurement base applied according to [the specification referenced in Appendix T, index \[12\]](#) ~~EN 13848-5:2008+A1:2010 point 8.6.~~
- (3) The infrastructure manager shall set out in the maintenance plan the base-length on which it will measure the track in order to check compliance with this requirement. The base-length of measurement shall include at least one base between 2 and 5 m.

4.2.8.4. **The immediate action limit of track gauge as an isolated defect**

- (1) The immediate action limits of track gauge as an isolated defect are set out in Table 12.

Table 12

Immediate action limits of track gauge

Speed [km/h]	Dimensions [mm]	
	Minimum track gauge	Maximum track gauge
$v \leq 120$	1 426	1 470
$120 < v \leq 160$	1 427	1 470
$160 < v \leq 230$	1 428	1 463
$v > 230$	1 430	1 463

- (2) This provision has been left intentionally blank


4.2.8.5. **The immediate action limit for cant**

- (1) The maximum cant allowed in service is 180 mm.
- (2) The maximum cant allowed in service is 190 mm for dedicated passenger traffic lines.

4.2.8.6. **The immediate action limits for switches and crossings**

Figure 2

Point retraction in fixed common crossings

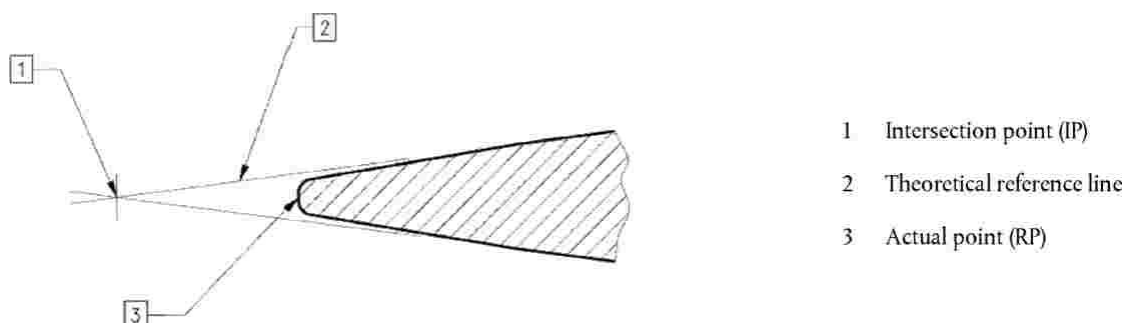

- (1) The technical characteristics of switches and crossings shall comply with the following in-service values:

- (a) Maximum value of free wheel passage in switches: 1 380 mm.

This value can be increased if the infrastructure manager demonstrates that the actuation and locking system of the switch is able to resist the lateral impact forces of a wheelset.

- (b) Minimum value of fixed nose protection for common crossings: 1 392 mm.

This value is measured 14 mm below the running surface, and on the theoretical reference line, at an appropriate distance back from the actual point (RP) of the nose as indicated in Figure 2.

For crossings with point retraction, this value can be reduced. In this case the infrastructure manager shall demonstrate that the point retraction is sufficient to guarantee that the wheel will not hit the nose at the actual point (RP).

- (c) Maximum value of free wheel passage at crossing nose: 1 356 mm.
- (d) Maximum value of free wheel passage at check rail/wing rail entry: 1 380 mm.
- (e) Minimum flangeway width: 38 mm.
- (f) Minimum flangeway depth: 40 mm.
- (g) Maximum height of check rail: 70 mm.

- (2) All relevant requirements for switches and crossings are also applicable to other technical solutions using switch rails, for example side modifiers used in multi-rail track.

4.2.9. Platforms

- (1) The requirements of this point are only applicable to passenger platforms where trains are intended to stop in normal service.
- (2) For the requirements of this point it is permissible to design platforms required for the current service requirement provided provision is made for the reasonably foreseeable future service requirements. When specifying the interfaces with trains intended to stop at the platform, consideration shall be given to both the current service requirements and the reasonably foreseeable service requirements at least 10 years following the bringing into service of the platform.

4.2.9.1. Usable length of platforms

The usable length of a platform shall be defined according to ~~point~~ [clause 4.2.1](#).

4.2.9.2. Platform height

- (1) The nominal platform height shall be 550 mm or 760 mm above the running surface for radii of 300 m or more.
- (2) For smaller radii the nominal platform height may be adjusted depending on the platform offset to minimise the stepping distance between the train and the platform.
- (3) For platforms where trains, which are outside the scope of the LOC&PAS NTSN, are intended to stop, different provisions for the nominal platform height might apply.

4.2.9.3. Platform offset

- (1) The distance between the track centre and the platform edge parallel to the running plane (b_q), as defined in [the specification referenced in Appendix T, index \[3\]](#) ~~chapter 13 of EN 15273-3:2013~~, shall be set on the basis of the installation limit gauge (b_{qlim}). The installation limit gauge shall be calculated on the basis of the gauge G1.
- (2) The platform shall be built close to the gauge within a maximum tolerance of 50 mm. The value for b_q shall therefore respond to:

$$b_{qlim} \leq b_q \leq b_{qlim} + 50 \text{ mm.}$$

4.2.9.4. Track layout alongside platforms

- (1) Track adjacent to the platforms for new lines shall preferably be straight, but shall nowhere have a radius of less than 300 m.
- (2) No values are specified for an existing track alongside new, renewed or upgraded platforms.

4.2.10. Health, safety and environment

4.2.10.1. Maximum pressure variations in tunnels

- (1) Any tunnel or underground structure intended to be operated at speeds greater than or equal to 200 km/h has to provide that maximum pressure variation, caused by the passage of a train running at the maximum allowed speed in the tunnel, do not exceed 10 kPa during the time taken for the train to pass through the tunnel.
- (2) Above requirement has to be fulfilled along the outside of any train complying with the Locomotives and Passenger NTSN.

4.2.10.2. Effect of crosswinds

- (1) A line is interoperable from the cross-wind point of view if safety is ensured for a reference train running along that line under the most critical operational conditions.
- (2) The rules for proving conformity shall take into account the characteristic wind curves of the reference trains defined in the LOC&PAS NTSN.
- (3) If safety cannot be achieved without mitigating measures, either due to the geographic situation or to other specific features of the line, the infrastructure manager shall take the necessary measures to maintain the safety, for example by:
 - locally reducing train speeds, possibly temporarily during periods at risk of storms,
 - installing equipment to protect the track section concerned from cross winds,
 - other appropriate means.
- (4) It shall be demonstrated that safety is achieved after measures taken.

4.2.10.3. Aerodynamic effect on ballasted track

- (1) The aerodynamic interaction between rolling stock and infrastructure may cause the lifting and further blowing away of ballast stones from the track bed in plain line and switches and crossings (Ballast pick up). This risk shall be mitigated.
- (2) The requirements for the infrastructure subsystem aimed at mitigating the risk for “ballast pick up” apply only to lines intended to be operated at speed greater than 250 km/h.
- (3) The requirements of point (2) above are an open point.

4.2.11. Provision for operation

4.2.11.1. Location markers

Location markers shall be provided at nominal intervals along the track of not more than 1 000 m.

4.2.11.2. Equivalent conicity in service

- (1) If ride instability is reported, the railway undertaking and the infrastructure manager shall localise the section of the line in a joint investigation according ~~paragraphs to points~~ (2) and (3) hereafter.

Note: This joint investigation is also specified in ~~point clause~~ 4.2.3.4.3.2 of NTSN LOC & PAS for action on rolling stock.

- (2) The infrastructure manager shall measure the track gauge and the railhead profiles at the site in question at a distance of approximate 10 m. The mean equivalent conicity over 100 m shall be calculated by modelling with the wheelsets (a) – (d) mentioned in ~~paragraph point~~ 4.2.4.5(4) of this NTSN in order to check for compliance, for the purpose of the joint investigation, with the limit equivalent conicity for the track specified in Table 14.

Table 14

Equivalent conicity in service limit values for the track (for the purpose of joint investigation)

Speed range [km/h]	Maximum value of mean equivalent conicity over 100 m
$v \leq 60$	assessment not required
$60 < v \leq 120$	0,40
$120 < v \leq 160$	0,35
$160 < v \leq 230$	0,30
$v > 230$	0,25

- (3) If the mean equivalent conicity over 100 m complies with the limit values in Table 14, a joint investigation by the railway undertaking and the infrastructure manager shall be undertaken to specify the reason for the instability.

4.2.12. Fixed installations for servicing trains**4.2.12.1. General**

This ~~point~~-[clause](#) 4.2.12 sets out the infrastructure elements of the maintenance subsystem required for servicing trains.

4.2.12.2. Toilet discharge

Fixed installations for toilet discharge shall be compatible with the characteristics of the retention toilet system specified in the LOC & PAS NTSN.

4.2.12.3. Train external cleaning facilities

- (1) Where a washing plant is provided it shall be able to clean the outer sides of single or double-deck trains between a height of:
- (a) 500 to 3 500 mm for a single-deck train,
 - (b) 500 to 4 300 mm for double-deck trains.
- (2) The washing plant shall be designed so that trains can be driven through it at any speed between 2 km/h and 5 km/h.

4.2.12.4. **Water restocking**

(1) Fixed equipment for water restocking shall be compatible with the characteristics of the water system specified in the LOC & PAS NTSN.

(2) Fixed equipment for [the supply of drinking-water intended for human consumption](#) ~~supply on the interoperable network~~ shall be supplied with drinking water meeting the requirements of ~~Council~~ Directive ~~98/83/EC~~ [\(EU\) 2020/2184](#)².

~~(2)~~(3) [The materials used for the supply of water intended for human consumption to the rolling stock \(e.g. tank, pump, piping, water tap and sealing material and quality\) shall comply with the requirements applicable to water intended for human consumption.](#)

4.2.12.5. **Refuelling**

Refuelling equipment shall be compatible with the characteristics of the fuel system specified in the LOC & PAS NTSN.

4.2.12.6. **Electrical shore supply**

Where provided, electrical shore supply shall be by means of one or more of the power supply systems specified in the LOC & PAS NTSN.

4.3. **FUNCTIONAL AND TECHNICAL SPECIFICATION OF THE INTERFACES**

From the standpoint of technical compatibility, the interfaces of the infrastructure subsystem with the other subsystems are like described in the following points.

² [Directive \(EU\) 2020/2184 of the European Parliament and of the Council of 16 December 2020 on the quality of water intended for human consumption \(recast\) - OJ L 435, 23.12.2020, p. 1–62](#) ~~Directive 98/83/EC of 3 November 1998 on the quality of water intended for human consumption. Implemented by the Natural Mineral Water, Spring Water and Bottled Drinking Water (England) Regulations 2007, the Water Supply (Water Quality) Regulations 2016 No 614 and the Private Water Supplies (England) Regulations 2016 No 618. This EU legislation is EU derived domestic legislation under section 2 of the European Union (Withdrawal) Act 2018, and has been amended under that Act by the Food (Amendment) (England) (EU Exit) Regulations 2019 and the Floods and Water (Amendment etc.) (EU Exit) Regulations 2019.~~

4.3.1. Interfaces with the rolling stock subsystem

Table 15

Interfaces with the rolling stock subsystem, ‘Locomotives and Passenger Rolling Stock NTSN’

Interface	Reference Infrastructure NTSN	Reference Locomotives and Passenger Rolling Stock NTSN
Track gauge	4.2.4.1 Nominal track gauge 4.2.5.1 Design geometry of switches and crossings 4.2.8.6 The immediate action limits for switches and crossings	4.2.3.5.2.1 Mechanical and geometrical characteristics of wheelset 4.2.3.5.2.3 Variable gauge wheelsets
Gauge	4.2.3.1 Structure gauge 4.2.3.2 Distance between track centres 4.2.3.5 Minimum radius of vertical curve 4.2.9.3 Platform offset	4.2.3.1 Gauging
Axle load and axle spacing	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1 Resistance of new bridges to traffic loads 4.2.7.2 Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures 4.2.7.4 Resistance of existing bridges and earthworks to traffic loads	4.2.2.10 Load conditions and weighed mass 4.2.3.2.1 Axle load parameter
Running characteristics	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1.4 Nosing forces	4.2.3.4.2.1 Limit values for running safely 4.2.3.4.2.2 Track loading limit values

Interface	Reference Infrastructure NTSN	Reference Locomotives and Passenger Rolling Stock NTSN
Ride stability	4.2.4.4 Equivalent conicity 4.2.4.6 Railhead profile for plain line 4.2.11.2 Equivalent conicity in service	4.2.3.4.3 Equivalent conicity 4.2.3.5.2.2 Mechanical and geometrical characteristics of wheels
Longitudinal actions	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking (longitudinal loads)	4.2.4.5 Braking performance
Minimum horizontal curve radius	4.2.3.4 Minimum radius of horizontal curve	4.2.3.6 Minimum curve radius Annex A, A.1 Buffers
Running dynamic behaviour	4.2.4.3 Cant deficiency	4.2.3.4.2 Running dynamic behaviour
Maximum deceleration	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking	4.2.4.5 Braking performance
Aerodynamic effect	4.2.3.2 Distance between track centres 4.2.7.3 Resistance of new structures over or adjacent to tracks 4.2.10.1 Maximum pressure variations in tunnels 4.2.10.3 Aerodynamic effect on ballasted track	4.2.6.2.1 Slipstream effects on passengers on platforms and on trackside workers 4.2.6.2.2 Head pressure pulse 4.2.6.2.3 Maximum pressure variations in tunnels 4.2.6.2.5 Aerodynamic effect on ballasted tracks
Crosswind	4.2.10.2 Effect of crosswinds	4.2.6.2.4 Crosswind
Installations for servicing trains	4.2.12.2 Toilet discharge 4.2.12.3 Train external cleaning facilities 4.2.12.4 Water restocking	4.2.11.3 Toilet discharge system 4.2.11.2.2 Exterior cleaning through a washing plant

Interface	Reference Infrastructure NTSN	Reference Locomotives and Passenger Rolling Stock NTSN
	4.2.12.5 Refuelling 4.2.12.6 Electric shore supply	4.2.11.4 Water refilling equipment 4.2.11.5 Interface for water refilling 4.2.11.7 Refuelling equipment 4.2.11.6 Special requirements for stabling of trains

Table 16

Interfaces with the rolling stock subsystem, '~~Freight Wagons~~WAG NTSN'

Interface	Reference Infrastructure NTSN	Reference Freight wagons WAG NTSN
Track gauge	4.2.4.1 Nominal track gauge 4.2.4.6 Railhead profile for plain line 4.2.5.1 Design geometry of switches and crossings 4.2.8.6 The immediate action limits for switches and crossings	4.2.3.6.2 Characteristics of wheelsets 4.2.3.6.3 Characteristics of wheels
Gauge	4.2.3.1 Structure gauge 4.2.3.2 Distance between track centres 4.2.3.5 Minimum radius of vertical curve 4.2.9.3 Platform offset	4.2.3.1 Gauging
Axle load and axle spacing	4.2.6.1 Track resistance to vertical loads 4.2.6.3 Lateral track resistance 4.2.7.1 Resistance of new bridges to traffic loads 4.2.7.2 Equivalent vertical loading for new earthworks and earth pressure effects imposed on new structures 4.2.7.4 Resistance of existing bridges and earthworks to traffic loads	4.2.3.2 Compatibility with load carrying capacity of lines

Interface	Reference Infrastructure NTSN	Reference Freight wagens WAG NTSN
Running dynamic behaviour	4.2.8 Immediate action limits on track geometry defects	4.2.3.5.2 Running dynamic behaviour
Longitudinal actions	4.2.6.2 Longitudinal track resistance 4.2.7.1.5 Actions due to traction and braking (longitudinal loads)	4.2.4.3.2 Brake performance
Minimum curve radius	4.2.3.4 Minimum radius of horizontal curve	4.2.2.1 Mechanical interface
Vertical curve	4.2.3.5 Minimum radius of vertical curve	4.2.3.1 Gauging

4.3.2. Interfaces with the energy subsystem

Table 17

Interfaces with the energy subsystem

Interface	Reference Infrastructure NTSN	Reference Energy NTSN
Gauge	4.2.3.1 Structure gauge	4.2.10 Pantographs gauge

4.3.3. Interfaces with the control command and signalling subsystem

Table 18

Interfaces with the control command and signalling subsystem

Interface	Reference Infrastructure NTSN	Reference Control Command and Signalling NTSN
Structure gauge set for CCS installations. Visibility of track-side CCS objects.	4.2.3.1 Structure gauge	4.2.5.2 Eurobalise communication (space for installation) 4.2.5.3 Euroloop communication (space for installation) 4.2.10 Train detection systems (space for installation)

		4.2.15 Visibility of track-side control-command and signalling objects
--	--	--

4.3.4. Interfaces with the operation and traffic management subsystem

Table 19

Interfaces with the operation and traffic management subsystem

Interface	Reference Infrastructure NTSN	Reference Operation and Traffic Management NTSN
Ride stability	4.2.11.2 Equivalent conicity in service	4.2.3.4.4 Operational quality
Use of eddy current brakes	4.2.6.2 Longitudinal track resistance	4.2.2.6.2 Braking performance
Crosswinds	4.2.10.2 Effect of crosswinds	4.2.3.6.3 Contingency arrangements
Operating rules	4.4 Operating rules	4.2.1.2.2.2 Modifications to information contained in the route book 4.2.3.6 Degraded operation
Staff competences	4.6 Professional competences	2.2.1 Staff and trains

4.4. OPERATING RULES

- (1) Operating rules are developed within the procedures described in the infrastructure manager's safety management system. These rules take into account the documentation related to operation which forms a part of the technical file as required in regulation 17(2)(a) of and Schedule 4 to the Railways (Interoperability) Regulations 2011.
- (2) In certain situations, involving pre-planned works, it may be necessary to temporarily suspend the specifications of the infrastructure subsystem and its interoperability constituents defined in ~~sections~~[chapters](#) 4 and 5 of this NTSN.

4.5. MAINTENANCE RULES

- (1) Maintenance rules are developed within the procedures described in the infrastructure manager's safety management system.
- (2) The maintenance file shall be prepared before placing a line into service as the part of the technical file accompanying the declaration of verification
- (3) The maintenance plan shall be drawn up for the subsystem to ensure that the requirements set out in this NTSN are maintained during its lifetime.

4.5.1. Maintenance file

A maintenance file shall contain at least:

- (a) a set of values for immediate action limits,
- (b) the measures taken (for example speed restriction, repair time) when prescribed limits are not met,

related to track geometric quality and limits on isolated defects.

4.5.2. Maintenance plan

The infrastructure manager shall have a maintenance plan containing the items listed in point 4.5.1 together with at least the following:

- (a) a set of values for intervention limits and alert limits,
- (b) a statement about the methods, professional competences of staff and personal protective safety equipment necessary to be used,
- (c) the rules to be applied for the protection of people working on or near the track,
- (d) the means used to check that in-service values are respected,
- (e) the measures taken, for speed greater than 250 km/h, to mitigate the risk of ballast pick up.

4.6. PROFESSIONAL QUALIFICATIONS

The professional qualifications of staff required for operation and maintenance of the infrastructure subsystem are not set out in this NTSN but are described in the infrastructure manager's safety management system.

4.7. HEALTH AND SAFETY CONDITIONS

- (1) The health and safety conditions of staff required for the operation and maintenance of the infrastructure subsystem shall be compliant with the relevant national legislation.
- (2) The issue is covered by the procedures described in the infrastructure manager's safety management system.

5. INTEROPERABILITY CONSTITUENTS

5.1. BASIS ON WHICH INTEROPERABILITY CONSTITUENTS HAVE BEEN SELECTED

- (1) The requirements of ~~point~~ [section 5.3](#) are based on a traditional design of ballasted track with Vignole (flat-bottom) rail on concrete or wooden sleepers and fastening providing resistance to longitudinal slip by bearing on the rail foot.
- (2) Components and subassemblies used for the construction of other designs of track are not considered to be interoperability constituents.

5.2. LIST OF CONSTITUENTS

- (1) For the purposes of this technical specification for interoperability, only the following elements, whether individual components or subassemblies of the track are declared to be 'interoperability constituents':
 - (a) the rail (5.3.1),
 - (b) the rail fastening systems (5.3.2),
 - (c) track sleepers (5.3.3).
- (2) The following points describe the specifications applicable to each of these constituents.
- (3) Rails, fastenings and sleepers used for short length of track for specific purposes, for example in switches and crossings, at expansion devices, transition slabs and special structures, are not considered to be interoperability constituents.

5.3. CONSTITUENTS PERFORMANCES AND SPECIFICATIONS

5.3.1. The rail

The specifications of the 'rail' interoperability constituent concern the following parameters:

- (a) railhead profile,
- (b) rail steel.

5.3.1.1. *Railhead profile*

The rail head profile shall fulfil the requirements of ~~point~~[clause](#) 4.2.4.6 'Railhead profile for plain line'.

5.3.1.2. *Rail steel*

- (1) The rail steel is relevant to the requirements of ~~point~~[clause](#) 4.2.6 'Track resistance to applied loads'.
- (2) The rail steel shall meet the following requirements:
 - (a) The rail hardness shall be at least 200 HBW.
 - (b) The tensile strength shall be at least 680 MPa.
 - (c) Minimum number of cycles at fatigue test without failure shall be at least 5×10^6 .

5.3.2. The rail fastening systems

- (1) The rail fastening system is relevant to the requirements of ~~point~~[clause](#) 4.2.6.1 for 'Track resistance to vertical loads', ~~point~~[clause](#) 4.2.6.2 for 'Longitudinal track resistance' and ~~point~~[clause](#) 4.2.6.3 for 'Lateral track resistance'.
- (2) The rail fastening system shall comply in laboratory test conditions with the following requirements:
 - [\(a\)](#) the longitudinal force required to cause the rail to begin to slip (i.e. move in an inelastic way) through a single rail fastening assembly shall be at least 7 kN and for speeds of more than 250 km/h shall be at least 9 kN,

(b) the rail fastening shall resist application of 3000000 cycles of the typical load applied in a sharp curve, such that the change in performance of the fastening system shall not exceed:

- 20 % in terms of clamping force,
- 25 % in terms of vertical stiffness,
- a reduction of more than 20 % in terms of longitudinal restraint.

The typical load shall be appropriate to:

- the maximum axle load the rail fastening system is designed to accommodate,
- the combination of rail, rail inclination, rail pad and type of sleepers with which the fastening system may be used.

5.3.3. Track sleepers

- (1) Track sleepers shall be designed such that when they are used with a specified rail and rail fastening system they will have properties that are consistent with the requirements of ~~point~~[clause 4.2.4.1](#) for 'Nominal track gauge', ~~point~~[clause 4.2.4.7](#) for 'Rail inclination' and ~~point~~[clause 4.2.6](#) for 'Track resistance to applied loads'.
- (2) For the nominal track gauge system of 1 435 mm, the design track gauge for track sleepers [in straight alignments and in horizontal curves with radius greater than 300 m](#) shall be 1 437 mm.

6. ASSESSMENT OF CONFORMITY OF INTEROPERABILITY CONSTITUENTS AND UK VERIFICATION OF THE SUBSYSTEMS

Modules for the procedures for assessment of conformity and suitability for use and UK verification are defined in Article 8 of this NTSN.

6.1. INTEROPERABILITY CONSTITUENTS

6.1.1. Conformity assessment procedures

- (1) The conformity assessment procedure of interoperability constituents as defined in ~~section~~[chapter 5](#) of this NTSN shall be carried out by application of the relevant modules.

- (2) Serviceable interoperability constituents that are suitable for reuse are not subject to the conformity assessment procedures.

6.1.2. Application of modules as set out in the Modules NTSN

- (1) The following modules for conformity assessment of interoperability constituents are used:
- (a) CA ‘Internal production control’
 - (b) CB ‘UK type examination’
 - (c) CC ‘Conformity to type based on internal production control’
 - (d) CD ‘Conformity to type based on quality management system of the production process’
 - (e) CF ‘Conformity to type based on product verification’
 - (f) CH ‘Conformity based on full quality management system’
- (2) The modules for conformity assessment of interoperability constituents shall be chosen from those shown in Table 20.

Table 20

Modules for conformity assessment to be applied for interoperability constituents

Procedures	Rail	Rail fastening system	Track sleepers
		CA or CH	
Placed on the UK market	CB + CC or CB + CD or CB + CF or CH		

- (3) In the case of products placed on the UK market before the 12 December 2014, the type is considered to have been approved and therefore UK type examination (module CB) is not necessary, provided that the manufacturer demonstrates that tests and verification of interoperability constituents have been considered successful for previous applications under comparable conditions and are in conformity with the requirements of the INF TSI 1299/2014/EU. In this case these assessments shall remain valid in the new application. If it is not possible to demonstrate that the solution is positively

proven in the past, the procedure for interoperability constituents placed on the GB market after publication of this NTSN applies.

- (4) The conformity assessment of interoperability constituents shall cover the phases and characteristics as indicated in Table 36 of Appendix A to this NTSN.

6.1.3. Innovative solutions for interoperability constituents

If an innovative solution is proposed for an interoperability constituent, the procedure described in Article 10 shall apply.

6.1.4. UK declaration of conformity for interoperability constituents

6.1.4.1. *Interoperability constituents subject to other requirements*

- (1) Regulation 25(4) of the Railways (Interoperability) Regulations 2011 states that if an interoperability constituent is subject to other requirements in any enactment or rule of law, a person may only draw up a UK declaration of conformity or suitability for use if satisfied that the interoperability constituent meets those other requirements and the person must state in the declaration that the interoperability constituent meets those other requirements;
- (2) in accordance with point 3(e) of Schedule 8 to the Railways (Interoperability) Regulations 2011, the UK declaration of conformity or suitability for use shall include a list of restrictions or conditions of use.

6.1.4.2. *UK declaration of conformity for rails*

No statement setting out the conditions of use is required.

6.1.4.3. *UK declaration of conformity for rail fastening systems*

The UK declaration of conformity shall be accompanied by statement setting out:

- (a) the combination of rail, rail inclination, rail pad and type of sleepers with which the fastening system may be used
- (b) the maximum axle load the rail fastening system is designed to accommodate.

6.1.4.4. *UK declaration of conformity for track sleepers*

The UK declaration of conformity shall be accompanied by statement setting out:

- (a) the combination of rail, rail inclination and type of rail fastening system with which the sleeper may be used,
- (b) the nominal and design track gauge,
- (c) the combinations of axle load and train speed the track sleeper is designed to accommodate.

6.1.5. Particular assessment procedures for interoperability constituents

6.1.5.1. Assessment of rails

Assessment of rail steel shall be done according to the following requirements:

- (a) Rail hardness shall be tested for position RS according to [the specification referenced in Appendix T, index \[7\]](#) ~~EN 13674 1:2011 paragraph 9.1.8, measured using one specimen (control sample out of production).~~
- (b) Tensile strength shall be tested according to [the specification referenced in Appendix T, index \[7\]](#) ~~EN 13674 1:2011 paragraph 9.1.9, measured using one specimen (control sample out of production).~~
- (c) Fatigue test shall be done according to [the specification referenced in Appendix T, index \[7\]](#) ~~EN 13674 1:2011 paragraph 8.1 and paragraph 8.4.~~

6.1.5.2. Assessment of sleepers

- (1) ~~Until 31 May 2021 a design track gauge for track sleepers below 1 437 mm shall be allowed~~ [Not used](#).
- (2) For polyvalent gauge and multiple gauge track sleepers it is allowed not to assess the design track gauge for the nominal track gauge of 1 435 mm.

6.2. INFRASTRUCTURE SUBSYSTEM

6.2.1. General provisions

- (1) At the request of the applicant, the approved body carries out the UK verification of the infrastructure subsystem in accordance with Schedule 4 to the Railways (Interoperability) Regulations 2011 and in accordance with the provisions of the relevant modules.
- (2) If the applicant demonstrates that tests or assessments of an infrastructure subsystem or parts of the subsystem are the same as have been successful for

previous applications of a design, the approved body shall consider the results of these tests and assessments for the UK verification.

- (3) The UK verification of the infrastructure subsystem shall cover the phases and characteristics indicated in Table 37 in Appendix B to this NTSN.
- (4) Performance parameters as set out in ~~point~~[clause](#) 4.2.1 of this NTSN are not subject to the UK verification of the subsystem.
- (5) Particular assessment procedures for specific basic parameters of infrastructure subsystem are set out in ~~point~~[clause](#) 6.2.4.
- (6) The applicant shall draw up the UK declaration of verification for the infrastructure subsystem in accordance with regulations 16 and 17 and Schedule 5 to the Railways (Interoperability) Regulations 2011.

6.2.2. Application of modules

For the UK verification procedure of the infrastructure subsystem, the applicant may choose either:

- (a) Module SG: UK verification based on unit verification, or
- (b) Module SH1: UK verification based on full quality management system plus design examination.

6.2.2.1. Application of module SG

In the case where UK verification is most effectively undertaken by using information collected by the infrastructure manager, contracting entity or the main contractors involved (for example data obtained using track recording vehicle or other measuring devices), the approved body shall take this information into account to assess conformity.

6.2.2.2. Application of module SH1

The SH1 module may be chosen only where the activities contributing to the proposed subsystem to be verified (design, manufacturing, assembling, installation) are subject to a quality management system for design, production, final product inspection and testing, approved and surveyed by an approved body.

6.2.3. Innovative solutions

If an innovative solution is proposed for the infrastructure subsystem, the procedure described in Article 10 shall apply.

6.2.4. Particular assessment procedures for infrastructure subsystem

6.2.4.1. *Assessment of Structure gauge*

- (1) Assessment of structure gauge as a design review shall be done against characteristic cross sections using the results of calculations made by infrastructure manager or the contracting entity on the basis of [the specification referenced in Appendix T, index \[3\]](#)~~sections 5, 7, 10, Annex C and point D.4.8 of Annex D of EN 15273-3:2013.~~
- (2) Characteristic cross sections are:
 - (a) track without cant,
 - (b) track with maximum cant,
 - (c) track with a civil engineering structure over the line
 - (d) any other location where the designed installation limit gauge is approached by less than 100 mm or the installation nominal gauge or uniform gauge is approached by less than 50 mm.
- (3) After assembly before putting into service clearances shall be verified at locations where the designed installation limit gauge is approached by less than 100 mm or the installation nominal gauge or uniform gauge is approached by less than 50 mm.

6.2.4.2. *Assessment of distance between track centres*

- (1) A design review for assessment of the distance between track centres shall be done using the results of calculations made by the Infrastructure Manager or the contracting entity on the basis of [the specification referenced in Appendix T, index \[3\]](#)~~chapter 9 of EN 15273-3:2013.~~ The nominal distance between track centres shall be checked at the line layout where distances are given in parallel to the horizontal plane. The limit installation distance between track centres shall be checked with the radius and relevant cant.
- (2) After assembly before putting into service, distance between track centres shall be verified at critical locations where the limit installation distance between track centres as defined according [to the specification referenced in Appendix T, index \[3\]](#)~~chapter 9 of EN 15273-3:2013~~ is approached by less than 50 mm.

6.2.4.3. Assessment of nominal track gauge

- (1) Assessment of the nominal track gauge at design review shall be done by checking the self-declaration of the applicant.
- (2) Assessment of the nominal track gauge at assembly before putting into service shall be done by checking the interoperability constituent sleeper's certificate. For non-certified interoperability constituents assessment of the nominal track gauge shall be done by checking the self-declaration of the applicant.

6.2.4.4. Assessment of track layout

- (1) At design review the curvature, cant, cant deficiency and abrupt change of cant deficiency shall be assessed against the local design speed.

(2) Assessment of switches and crossings layout is not required.

~~(2)~~(3) At assembly before putting into service, for the review of the minimum horizontal curve the measurement values provided by the applicant or infrastructure manager shall be assessed. Rules for acceptance of works defined by the infrastructure manager shall be taken into account.

6.2.4.5. Assessment of cant deficiency for trains designed to travel with higher cant deficiency

Point 4.2.4.3(2) states that 'It is permissible for trains specifically designed to travel with higher cant deficiency (for example multiple units with lower axle loads; vehicles with special equipment for the negotiation of curves) to run with higher cant deficiency values, subject to a demonstration that this can be achieved safely'. This demonstration is outside the scope of this NTSN and thus not subject to an approved body verification of the infrastructure subsystem. The demonstration shall be undertaken by the RU, if necessary in cooperation with the IM.

6.2.4.6. Assessment of design values for equivalent conicity

Assessment of design values for equivalent conicity shall be done using the results of calculations made by the infrastructure manager or the contracting entity on the basis of [the specification referenced in Appendix T, index \[5\]](#) ~~EN 15302:2008+A1:2010~~.

6.2.4.7. Assessment of railhead profile

- (1) The design profile of new rails shall be checked against ~~point~~ [clause 4.2.4.6](#).

- (2) Reused serviceable rails shall not be subject to the requirements for railhead profile as set out in ~~point clause~~ 4.2.4.6.

6.2.4.8. Assessment of switches and crossings

Assessment of switches and crossings related to ~~points clauses~~ 4.2.5.1 to 4.2.5.3 shall be done by checking that a self-declaration of the infrastructure manager or contracting entity exists.

6.2.4.9. Assessment of new structures, earthworks and earth pressure effects

- (1) Assessment of new structures shall be done by checking the traffic loads and the track twist limit used for design against the minimum requirements of ~~points clauses~~ 4.2.7.1 and 4.2.7.3. The approved body is not required to review the design nor carry out any calculations. When reviewing the value of factor alpha used in the design according to ~~point clause~~ 4.2.7.1 it is only necessary to check that the value of factor alpha satisfies Table 11.
- (2) Assessment of new earthworks and earth pressure effects shall be done by checking the vertical loads used for design according to requirements of ~~point clause~~ 4.2.7.2. When reviewing the value of factor alpha used in the design according to ~~point clause~~ 4.2.7.2 it is only necessary to check that the value of factor alpha satisfies Table 11. The approved body is not required to review the design nor carry out any calculations.

6.2.4.10. Assessment procedure of existing structures

- (1) Assessment of existing structures against the requirements of point 4.2.7.4
- (3) (b) and (c) shall be done by one of the following methods:
 - (a) check that the values of EN line categories, in combination with the allowed speed published or intended to be published for the lines containing the structures, ~~is~~ are in line with the requirements of Appendix E of this NTSN,
 - (b) check that the values of EN line categories, in combination with the allowed speed specified for the ~~structures bridges~~ or for the design, (or alternative requirements specified with LM71 and factor alpha (α) for P1 and P2) ~~are~~ is in line with the requirements of Appendix E of this NTSN,
 - (c) check the traffic loads specified for the structures or for the design against the minimum requirements of ~~points clauses~~ 4.2.7.1.1, ~~and~~ 4.2.7.1.2 and 4.2.7.2. When reviewing the value of factor alpha (α) according to ~~point clauses~~ 4.2.7.1.1 and 4.2.7.2 it is only necessary to

check that the value of factor alpha (α) is in line with the value of factor alpha (α) mentioned in Table 11.

(d) Where the requirement for an existing bridge is specified by reference to the design load model HSLM in Appendix E the assessment of the existing bridge shall be done by either of the following items:

- checking the specification of the design of the existing bridge or
- checking the specification of the dynamic appraisal or
- checking the published load carrying capacity of the existing bridge in the register of infrastructure (RINF) for the parameter 1.1.1.1.2.4.2 (Compliance of structures with the High Speed Load Model (HSLM))

~~(e)~~(e) Where the requirement for an existing bridge is specified by reference to alternative dynamic loading requirements (Appendix E note 8), the assessment of the existing bridge shall be done by checking the specification of the dynamic appraisal for these alternative loading requirements against the requirements in Appendix E note 8.

- (2) It is not required to review the design nor carry out any calculations.
- (3) For existing structures assessment point 4.2.7.4(4) applies respectively.

6.2.4.11. Assessment of platform offset

- (1) Assessment of the distance between the track centre and the platform edge as a design review shall be done using the results of calculations made by the Infrastructure Manager or the contracting entity on the basis of [the specification referenced in Appendix T, index \[3\]](#)~~chapter 13 of EN 15273-3:2013.~~
- (2) After assembly before putting into service clearances shall be verified. The offset is checked at the ends of the platform and every 30 m in straight track and every 10 m in curved track.

6.2.4.12. Assessment of maximum pressure variations in tunnels

- (1) Assessment of maximum pressure variation in the tunnel (10 kPa criterion) shall be done using the results of numerical simulations according to [the specification referenced in Appendix T, index \[14\]](#)~~chapters 4 and 6 of EN 14067-5:2006+A1:2010~~ made by the infrastructure manager or the contracting entity on the basis of all expected operational conditions with the trains complying with the Locomotives and Passengers NTSN and intended to

run at speeds greater than or equal to 200 km/h in the specific tunnel to be assessed.

- (2) The input parameters to be used are to be such that the reference characteristic pressure signature of the trains set out in the locomotives and passenger rolling stock NTSN is fulfilled.
- (3) The reference cross section areas of the interoperable trains (constant along a train) to be considered is to be, independently to each motor or trailer vehicle:
 - (a) 12 m² for vehicles designed for GC and DE3 reference kinematic profile,
 - (b) 11 m² for vehicles designed for GA and GB reference kinematic profile,
 - (c) 10 m² for vehicles designed for G1 reference kinematic profiles.

The vehicle gauge to be considered shall be set on the basis of the gauges selected according to ~~point~~[clause](#) 4.2.1.

- (4) The assessment may take into account construction features which reduce the pressure variation if any, as well as the tunnel length.
- (5) The pressure variations due to atmospheric or geographical conditions can be neglected.

6.2.4.13. Assessment of effect of crosswinds

This demonstration of the safety is outside the scope of this NTSN and thus not subject to an approved body verification. The demonstration shall be undertaken by the infrastructure manager, if necessary in cooperation with the railway undertaking.

6.2.4.14. Assessment of fixed installations for servicing trains

This NTSN does not cover assessment of fixed installations for servicing trains. Those responsible for such installations should have regard to any requirements contained in any other enactment or rule of law in relation to such assessments.

6.2.4.15. Assessment of compatibility with braking systems

The assessment of the requirements laid down in point 4.2.6.2.2(2) is not required.

6.2.5. Technical solutions giving presumption of conformity at design stage

Presumption of conformity at design stage for technical solutions may be assessed prior and independent from a specific project.

6.2.5.1. Assessment of track resistance for plain line

- (1) The demonstration of conformity of the track to the requirements of ~~point~~ [clause](#) 4.2.6 may be done by reference to an existing track design which meets the operating conditions intended for the subsystem concerned.
- (2) A track design shall be defined by the technical characteristics as set out in Appendix C.1 to this NTSN and by its operating conditions as set out in Appendix D.1 to this NTSN.
- (3) A track design is considered to be existing, if both of the following conditions are met:
 - (a) the track design has been in normal operation for at least one year and
 - (b) the total tonnage over the track was at least 20 million gross tons for the period of normal operation.
- (4) The operating conditions for an existing track design refer to conditions which have been applied in normal operation.
- (5) The assessment to confirm an existing track design shall be performed by checking that the technical characteristics as set out in Appendix C.1 to this NTSN and conditions of use as set out in Appendix D.1 to this NTSN are specified and that the reference to the previous use of the track design is available.
- (6) When a previously assessed existing track design is used in a project, the approved body shall only assess that the conditions of use are respected.
- (7) For new track designs that are based on existing track designs, a new assessment can be performed by verifying the differences and evaluating their impact on the track resistance. This assessment may be supported for example by computer simulation or by laboratory or in situ testing.
- (8) A track design is considered to be new, if at least one of the technical characteristics set out in Appendix C to this NTSN or one of conditions of use set out in Appendix D to this NTSN is changed.

6.2.5.2. Assessment for switches and crossing

- (1) The provisions as set out in ~~point~~ [clause](#) 6.2.5.1 are applicable for the assessment of track resistance for switches and crossings. Appendix C.2 sets out the technical characteristics of switches and crossings design and Appendix D.2 sets out the conditions of use of switches and crossings design.

- (2) Assessment of design geometry of switches and crossings shall be done according to ~~point~~[clause](#) 6.2.4.8 of this NTSN.
- (3) Assessment of maximum unguided length of fixed obtuse crossings shall be done according to ~~point~~[clause](#) 6.2.4.8 of this NTSN.

6.3.

~~NOT USED~~ **UK VERIFICATION WHEN SPEED IS USED AS A MIGRATION CRITERION**

- ~~(1) Point 7.5 allows a line to be put into service at a lower speed than the ultimate intended speed. This point sets out requirements for UK verification in this case.~~
- ~~(2) Some limiting values set out in section 4 depend on the intended speed of the route. Conformity should be assessed at the intended ultimate speed; however it is permissible to assess speed dependant characteristics at the lower speed at the time of placing in service.~~
- ~~(3) The conformity of the other characteristics for the intended speed of the route remains valid.~~
- ~~(4) To declare the interoperability at this intended speed, it is only necessary to assess the conformity of the characteristics temporarily not respected, when they are brought up to the required level.~~

6.4.

ASSESSMENT OF MAINTENANCE FILE

- ~~(1) Point 4.5 requires the infrastructure manager to have for each interoperable line a maintenance file for the infrastructure subsystem.~~
- ~~(2) The approved body shall confirm that the maintenance file exists and contains the items listed in point 4.5.1. The approved body is not responsible for assessing the suitability of the detailed requirements set out in the maintenance file.~~
- ~~(3) The approved body shall include a reference to the maintenance file required by point 4.5.1 of this NTSN in the technical file referred to in regulation 17(2) of the Railways (Interoperability) Regulations 2011.~~
- [\(1\) According to \[Article 15\(4\) of Directive \(EU\) 2016/797\], the applicant shall be responsible for compiling the technical file, containing the documentation requested for maintenance.](#)
- [\(2\) The ~~Notified~~ Approved Body shall verify only that the documentation requested for maintenance, as defined in clause 4.5.1 of this NTSN, is](#)

provided. The ~~Notified~~ Approved Body is not required to verify the information contained in the documentation provided.

6.5. SUBSYSTEMS CONTAINING INTEROPERABILITY CONSTITUENTS NOT HOLDING AN UK DECLARATION

The circumstances in which it is permissible to rely on an EC declaration of conformity rather than a UK declaration of conformity to place an interoperability constituent on the UK market and any relevant additional assessment requirements are set out in Part 3 and regulation 47A of the Railways (Interoperability) Regulations 2011 and in the NTSN concerning the further assessment of interoperability constituents which hold an EC declaration of conformity or suitability for use.

6.5.1. Conditions

- (1) Subject to 6.5 above, until 31 May 2021, an approved body is allowed to issue a UK certificate of verification for a subsystem even if some of the interoperability constituents incorporated within the subsystem are not covered by the relevant EC or UK declarations of conformity and/or suitability for use according to this NTSN (or relevant TSIs), if the following criteria are complied with:
 - (a) the conformity of the subsystem has been checked against the requirements of ~~section~~-chapter 4 and in relation to sections 6.2 to 7 (except ~~point~~-section 7.7 ‘Specific Cases’) of this NTSN by the approved body. Furthermore, the conformity of the ICs to ~~section~~-chapter 5 and section 6.1 does not apply, and
 - (b) the interoperability constituents, which are not covered by the relevant EC or UK declaration of conformity and/or suitability for use, have been used in a subsystem already approved and put in service in at least one of the Member States of the EU or the UK before the 1 January 2015.
- (2) UK declarations of conformity and/or suitability for use shall not be drawn up for the interoperability constituents assessed in this manner.

6.5.2. Documentation

- (1) The UK certificate of verification of the subsystem shall indicate clearly which interoperability constituents have been assessed by the approved body as part of the subsystem verification.
- (2) The UK declaration of verification of the subsystem shall indicate clearly:

- (a) Which interoperability constituents have been assessed as part of the subsystem;
- (b) Confirmation that the subsystem contains the interoperability constituents identical to those verified as part of the subsystem;
- (c) For those interoperability constituents, the reason(s) why the manufacturer did not provide an EC or UK Declaration of conformity and/or suitability for use before its incorporation into the subsystem, including the application of national technical rules or national technical rules notified under Article 17 of Directive 2008/57/EC³.

6.5.3. Maintenance of the subsystems certified according to 6.5.1.

- (1) During and after the transition period and until the subsystem is upgraded or renewed (taking into account the decision of the Competent Authority on application of the NTSNs), the interoperability constituents which do not hold an EC or UK Declaration of conformity and/or suitability for use and are of the same type are allowed to be used as maintenance related replacements (spare parts) for the subsystem, under the responsibility of the body responsible for maintenance.
- (2) In any case the body responsible for maintenance must ensure that the components for maintenance related replacements are suitable for their applications, are used within their area of use and enable interoperability to be achieved within the rail system while at the same time meeting the essential requirements. Such components must be traceable and certified in accordance with any national or international rule or any code of practice widely acknowledged in the railway domain.

6.6. SUBSYSTEM CONTAINING SERVICEABLE INTEROPERABILITY CONSTITUENTS THAT ARE SUITABLE FOR REUSE

6.6.1. Conditions

- (1) An approved body is allowed to issue a UK certificate of verification for a subsystem even if some of the interoperability constituents incorporated

³ Directive 2008/57/EC of the European Parliament and of the Council of on the interoperability of the rail system within the Community. Implemented by the Railways (Interoperability) Regulations 2011. The EU legislation is EU derived domestic legislation under section 2 of the European Union (Withdrawal) Act 2018, and it has been amended under that Act by the Railways (Interoperability) (Amendment) (EU Exit) Regulations 2019 SI (2019/345) to make amendments to EU legislation as a result of the UK's exit from the EU.

within the subsystem are serviceable interoperability constituents that are suitable for reuse, if the following criteria are complied with:

- (a) the conformity of the subsystem has been checked against the requirements of ~~section~~ [chapter](#) 4 and in relation to sections 6.2 to 7 (except ~~point~~ [section](#) 7.7 ‘Specific Cases’) of this NTSN by the approved body. Furthermore, the conformity of the ICs to [section](#) 6.1 does not apply, and
 - (b) the interoperability constituents are not covered by the relevant EC or UK declaration of conformity and/or suitability for use.
- (2) UK declarations of conformity and/or suitability for use shall not be drawn up for the interoperability constituents assessed in this manner.

6.6.2. Documentation

- (1) The UK certificate of verification of the subsystem shall indicate clearly which interoperability constituents have been assessed by the approved body as part of the subsystem verification.
- (2) The UK declaration of verification of the subsystem shall indicate clearly:
 - (a) Which interoperability constituents are serviceable interoperability constituents that are suitable for reuse;
 - (b) Confirmation that the subsystem contains the interoperability constituents identical to those verified as part of the subsystem.

6.6.3. Use of serviceable interoperability constituents in maintenance

- (1) Serviceable interoperability constituents that are suitable for reuse are allowed to be used as maintenance related replacements (spare parts) for the subsystem, under the responsibility of the body responsible for maintenance.
- (2) In any case the body responsible for maintenance must ensure that the components for maintenance related replacements are suitable for their applications, are used within their area of use, and enable interoperability to be achieved within the rail system while at the same time meeting the essential requirements. Such components must be traceable and certified in accordance with any national or international rule, or any code of practice widely acknowledged in the railway domain.

7. IMPLEMENTATION OF THE INFRASTRUCTURE NTSN

~~As referred to in Article 9, the UK has published an implementation plan.~~

~~7.1. APPLICATION OF THIS NTSN TO RAILWAY LINES~~

7.1. NATIONAL IMPLEMENTATION PLAN

(1) The UK shall develop a national plan for the implementation of this NTSN. This plan shall include all projects regarding new, renewal and upgrading of infrastructure subsystem and shall ensure a gradual migration within a reasonable timescale onwards an interoperable target infrastructure subsystem fully compliant with this NTSN.

~~Sections 4 to 6 and any specific provisions in points 7.2 to 7.6 here below apply in full to the lines within the geographical scope of this NTSN, which will be placed in service as interoperable lines after this NTSN is published.~~

7.2. APPLICATION OF THIS NTSN TO A NEW INFRASTRUCTURE SUBSYSTEM ~~RAILWAY LINES~~

(1) For a new infrastructure subsystem, the application of this NTSN shall be compulsory.

(2) For the purpose of this NTSN a ‘new line’ means a line that creates a route where none currently exists. ‘new infrastructure subsystem’ means an infrastructure subsystem placed into service after this NTSN enters into force that creates a route or a part of a route where none currently exists.

Any other infrastructure subsystems shall be considered as ‘existing infrastructure subsystems’.

(3) The following situations at least, but not restricted to, are not a “new” line (new infrastructure subsystem), but “upgrading”, for example to increase speed or capacity, may be considered as an upgraded line rather than a new line:

- (a) the realignment of part of an existing route,
- (b) the creation of a bypass,
- (c) the addition of one or more tracks on an existing route, regardless of the distance between the original tracks and the additional tracks.

7.3. APPLICATION OF THIS NTSN TO AN EXISTING INFRASTRUCTURE SUBSYSTEM ~~RAILWAY LINES~~

7.3.1. Performance criteria of the subsystem

“Upgrading” is a major modification work of an existing infrastructure subsystem resulting in at least compliance with one additional traffic code or a change in the declared combination of traffic codes (Table 2 and Table 3 of 4.2.1) or fall in the cases that are included in 7.2 (3).

7.3.2. Application of the NTSN

The conformity with this NTSN is mandatory for a subsystem or part(s) of it which are upgraded or renewed. However, this NTSN recognizes that due to the characteristics of the inherited railway system, compliance of existing infrastructure subsystem with this NTSN may be achieved through a gradual improvement of interoperability, as below.

For the upgraded infrastructure subsystem, the application of this NTSN shall be compulsory, and applied fully to the upgraded subsystem within the geographical coverage of the upgrading. The geographical coverage of the upgrading shall be defined based on locations and shall result in the compliance of all basic parameters of the infrastructure subsystem associated with the tracks that are subject to the upgrading.

In the event of a change other than an upgrading of the infrastructure subsystem, the application of this NTSN for each basic parameter (4.2.2) affected by a change shall be compulsory when the change requires carry out a new ‘EC’ verification procedure. Provisions defined in the Articles 6 and 7 of the Commission Implementing Regulation 2019/250 shall be applied.

In the abovementioned event and for those basic parameters not affected by a change, or when the change does not require carry out a new ‘EC’ verification procedure, the demonstration of the level of compliance with this NTSN is voluntary.

In case of upgrading or renewal of the infrastructure subsystem, the compliance with the requirements which are explicitly intended for new lines is not required.

For substitution in the framework of maintenance the formal verification in accordance with this NTSN, is not required. However, maintenance replacements should be, as far as it is reasonably practicable, undertaken in accordance with the requirements of this NTSN.

‘Renewal’ differs from a substitution undertaken in the framework of maintenance, since it gives the opportunity to achieve an NTSN compliant subsystem. For this purpose, ‘major substitution’ in the framework of ‘renewal’ should be interpreted as a project undertaken to systematically replace elements on a subsystem or part of it.

‘Substitution in the framework of maintenance’ means any replacement of components by parts of identical function and performance in the framework of maintenance.

Beside this gradual approach, the following exceptions are permitted for existing infrastructure subsystem, in case of upgrading or renewal:

(a) In case of upgrading or renewal of the infrastructure subsystem, for parameters cant governed by clause 4.2.4.2 of this NTSN and cant deficiency governed by clause 4.2.4.3 of this NTSN it is permitted to deviate from the limiting values as set out in this NTSN while respecting the exceptional limit values set out in the specification referenced in Appendix T index [4] for cant and cant deficiency respectively, and also applying specific restrictions and measures, as referred to in the notes inside the mentioned specification.

Applying this case cannot prevent the access of vehicles accepted/tested for the maximum values required in clause 4.2.4.3.

(b) In case of upgrading or renewal of the infrastructure subsystem, the following conditions related to platform height and offset governed by clauses 4.2.9.2 and 4.2.9.3 of this NTSN, shall apply:

It shall be allowed to apply other nominal platform heights for consistency with a particular ‘upgrading’ or ‘renewal’ programme of a railway line or a section of a railway line, provided it contributes to the step-free access of trains.

It shall be allowed to apply other nominal platform heights, if the compliance to the values set out by clause 4.2.9.2 of this NTSN would require structural alterations to any load bearing element.

It shall be allowed to apply other platform offset than the one defined in point 4.2.9.3 (2) as long as the value for b_q is equal or greater than b_{qlim} .

~~7.3.1. Upgrading of a line~~

~~(1) In accordance with regulation 2 of the Railways (Interoperability) Regulations 2011, “upgrading” means any major modification work on a subsystem or part of it which results in a change in the technical file accompanying the “EC”~~

~~or “UK” declaration of verification, if that technical file exists, and which improves the overall performance of the subsystem.~~

- ~~(2) The infrastructure subsystem of a line is considered to be upgraded in the context of this NTSN when at least the performance parameters axle load or gauge, as defined in point 4.2.1 are improved in order to meet the requirements of another traffic code.~~
- ~~(3) In accordance with regulation 2 of the Railways (Interoperability) Regulations 2011, “renewal” means any major substitution work on a subsystem or part of it which does not change the overall performance of the subsystem.~~
- ~~(4) For this purpose, major substitution should be interpreted as a project undertaken to systematically replace elements of a line or a section of a line. Renewal differs from a substitution in the framework of maintenance, referred to in point 7.3.3 below, since it gives the opportunity to achieve an NTSN compliant line. A renewal is the same case as upgrading, but without a change in performance parameters.~~
- ~~(5) The scope of the upgrading or renewal of the infrastructure subsystem may cover the entire subsystem on a given line or only certain parts of the subsystem. According to regulation 13 of the Railways (Interoperability) Regulations 2011, at the request of the applicant, the Competent Authority shall examine the project and decide whether a new authorisation for placing in service is needed.~~
- ~~(6) Where a new authorisation is required, parts of the infrastructure subsystem falling under the scope of the upgrading or renewal shall comply with this NTSN and shall be subject to the procedure established in regulation 17 of and Schedule 4 to the Railways (Interoperability) Regulations 2011, unless a permission for non application of NTSN is granted according to regulation 14 of the Railways (Interoperability) Regulations 2011.~~
- ~~(7) Where a new authorisation for placing in service is not required, compliance with this NTSN is recommended.~~

~~7.3.2. This provision has been left intentionally blank~~

~~7.3.3. Substitution in the framework of maintenance~~

- ~~(1) Where the parts of a subsystem on a line are maintained, the formal verification and authorisation for placing into service is not required in accordance with this NTSN. However, maintenance replacements should be, as far as it is reasonably practicable, undertaken in accordance with the requirements of this NTSN.~~

- ~~(2) The objective should be that maintenance replacements progressively contribute the development of an interoperable line.~~
- ~~(3) In order to bring progressively an important part of the infrastructure subsystem in a process towards interoperability, the following group of basic parameters should be adapted together:~~
- ~~(a) Line layout,~~
 - ~~(b) Track parameters,~~
 - ~~(c) Switches and crossings,~~
 - ~~(d) Track resistance to applied loads,~~
 - ~~(e) Structures resistance to traffic loads,~~
 - ~~(f) Platforms.~~
- ~~(4) In such cases, it is noted that each of the above elements taken separately cannot ensure compliance of the whole subsystem. The conformity of a subsystem can only be stated when all the elements are compliant with the NTSN.~~

~~7.3.4.~~ 7.3.3. Existing lines that are not subject to a renewal or upgrading project

The demonstration of the level of compliance of existing lines with the basic parameters of the NTSN is voluntary. [The procedure for this demonstration shall be](#) ~~it is recommended that this voluntary procedure is carried out~~ in accordance with Commission Recommendation 2014/881/EU⁴ of 18 November 2014.

7.3.4. Route compatibility checks before the use of authorised vehicles

[The procedure to be applied and the parameters of the infrastructure subsystem to be used by the railway undertaking, for the purpose of route compatibility check are described in clause 4.2.2.5 and appendix D1 of the OPE NTSN.](#)

⁴ 2014/881/EU: Commission Recommendation of 18 November 2014 on the procedure for demonstrating the level of compliance of existing railway lines with the basic parameters of the technical specifications for interoperability (OJ L 356, 12.12.2014). Not retained law under the European Union (Withdrawal) Act 2018.

7.4. ~~NOT USED~~ APPLICATION OF THIS NTSN TO EXISTING PLATFORMS

~~In case of upgrade or renewal of the infrastructure subsystem, the following conditions related to platform height governed by point 4.2.9.2 of this NTSN, shall apply:~~

- ~~(a) It shall be allowed to apply other nominal platform heights for consistency with a particular upgrade or renewal programme of a line or a section of a line.~~
- ~~(b) It shall be allowed to apply other nominal platform heights, if the work requires structural alterations to any load bearing element.~~

7.5. ~~NOT USED~~ SPEED AS AN IMPLEMENTATION CRITERION

- ~~(1) It is permissible to bring a line into service as an interoperable line at a lower speed than its intended ultimate line speed. However, when it is the case the line should not be constructed in a way that inhibits future adoption of the intended ultimate line speed.~~
- ~~(2) For example the distance between track centres shall be suitable for the intended ultimate line speed but the cant will need to be appropriate to the speed at the time the line is brought into service.~~
- ~~(3) Requirements for assessment of conformity in this case are set out in section 6.3.~~

7.6. *This provision has been left intentionally blank*

7.7. UK SPECIFIC CASES

The following UK specific cases may be applied on particular networks. The UK specific cases are classified as:

- (a) **'P' cases:** permanent cases;
- (b) **'T' cases:** temporary cases (note that there are no T cases for the UK).

All UK specific cases and their relevant dates shall be re-examined in the course of future revisions of the NTSN with a view to limiting their technical and geographical scope based on an assessment of their impact on safety, interoperability, cross border services, and the practical and economic impacts of retaining or eliminating them.

UK Specific cases shall be limited to the route or network where they are strictly necessary and taken account of through route compatibility procedures.

7.7.1. *This provision has been left intentionally blank*

7.7.2. *This provision has been left intentionally blank*

7.7.3. *This provision has been left intentionally blank*

7.7.4. *This provision has been left intentionally blank*

7.7.5. *This provision has been left intentionally blank*

7.7.6. *This provision has been left intentionally blank*

7.7.7. *This provision has been left intentionally blank*

7.7.8. *This provision has been left intentionally blank*

7.7.9. *This provision has been left intentionally blank*

7.7.10. *This provision has been left intentionally blank*

7.7.11. *This provision has been left intentionally blank*

7.7.12. *This provision has been left intentionally blank*

7.7.13. *This provision has been left intentionally blank*

7.7.14. *This provision has been left intentionally blank*

7.7.15. *This provision has been left intentionally blank*

7.7.16. *This provision has been left intentionally blank*

7.7.17. Particular features on the network for Great Britain

7.7.17.1. NTSN categories of line (4.2.1)

P cases

- (1) Where line speeds are stated in kilometres per hour [km/h] as a category or performance parameter in this NTSN, it shall be allowed to translate the speed to equivalent miles per hour [mph] as in Appendix G, for the United Kingdom national network in Great Britain.
- (2) Instead of the column 'Gauge' in Table 2 and Table 3 of point 4.2.1(7), for the gauge of all lines except new, dedicated high speed lines of traffic code P1, it shall be allowed to use national technical rules as set out in Appendix Q.

7.7.17.2. Structure gauge (4.2.3.1)

P cases

Instead of point 4.2.3.1, for national gauges selected according to point 7.7.17.1(2), the structure gauge shall be set according to Appendix Q.

7.7.17.3. Distance between track centres (4.2.3.2)

P cases

- (1) Instead of point 4.2.3.2, the nominal distance between track centres shall be 3 400 mm on straight track and curved track with a radius of 400 m or greater.
- (2) Where topographical constraints prevent a nominal distance of 3 400 mm between track centres being achieved, it is permissible to reduce the distance between track centres provided special measures are put in place to ensure a safe passing clearance between trains.
- (3) Reduction in the distance between track centres shall be in accordance with the national technical rule set out in Appendix Q.

7.7.17.3.bis Equivalent conicity (4.2.4.5)

P cases

- (a) Instead of point 4.2.4.5.(3) design values of track gauge, rail head profile and rail inclination for plain line shall be selected to ensure that the equivalent conicity limits set out in Table 32 are not exceeded

Table 32

Equivalent conicity design limit values

	Wheel profile	
Speed range [km/h]	S1002, GV1/40	EPS
$v \leq 60$	Assessment not required	
$60 < v \leq 200$	0,25	0,30
$200 < v \leq 280$	0,20	0,20
$v > 280$	0,10	0,15

(b) Instead of point 4.2.4.5. (4) the following wheelsets shall be modelled passing over the designed track conditions (simulated by calculation according to EN 15302:2008+A1:2010):

- (a) S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR1.
- (b) S 1002 as defined in Annex C of EN 13715:2006+A1:2010 with SR2.
- (c) GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR1.
- (d) GV 1/40 as defined in Annex B of EN 13715:2006+A1:2010 with SR2.
- (e) EPS as defined in Annex D of EN 13715:2006+A1:2010 with SR1.

For SR1 and SR2 the following values apply:

- (f) For the 1 435 mm track gauge system SR1 = 1 420 mm and SR2 = 1 426 mm.

7.7.17.4. Maximum unguided length of fixed obtuse crossings (4.2.5.3)**P cases**

Instead of point 4.2.5.3, the design value of the maximum unguided length of fixed obtuse crossing shall be in accordance with the national technical rule set out in Appendix Q.

7.7.17.5. The immediate action limits for switches and crossings (4.2.8.6)**P cases**

Instead of point 4.2.8.6(1)(b), for the 'CEN56 Vertical' design of switches and crossings, a minimum value of fixed nose protection for common crossings of 1 388 mm is allowed (measured 14 mm below the running surface, and on the theoretical

reference line, at an appropriate distance back from the actual (RP) of the nose as indicated in Figure 2).

7.7.17.6. Platform height (4.2.9.2)

P cases

Instead of point 4.2.9.2, for platform height, national technical rules as set out in Appendix Q shall be allowed.

7.7.17.7. Platform offset (4.2.9.3)

P cases

Instead of point 4.2.9.3, for platform offset, national technical rules as set out in Appendix Q shall be allowed.

7.7.17.8. Equivalent conicity in service (4.2.11.2)

P cases

Instead of point 4.2.11.2.(2) the infrastructure manager shall measure the track gauge and the railhead profiles at the site in question at a distance of approximate 10 m. The mean equivalent conicity over 100 m shall be calculated by modelling with the wheelsets (a) – (e) mentioned in paragraph 7.7.17.3(2) of this NTSN in order to check for compliance, for the purpose of the joint investigation, with the limit equivalent conicity for the track specified in Table 14.

7.7.17.9. Assessment of structure gauge (6.2.4.1)

P cases

Instead of point 6.2.4.1, it shall be allowed to assess structure gauge in accordance with the national technical rules as set out in Appendix Q.

7.7.17.10. Assessment of distance between track centres (6.2.4.2)

P cases

Instead of point 6.2.4.2, it shall be allowed to assess distance between track centres in accordance with the national technical rules as set out in Appendix Q.

7.7.17.11. Assessment of platform offset (6.2.4.11)

P cases

Instead of point 6.2.4.11, it shall be allowed to assess platform offset in accordance with the national technical rules as set out in Appendix Q.

Appendix A Assessment of interoperability constituents

The characteristics of the interoperability constituents to be assessed by the approved body or the manufacturer in accordance with the selected module, in the different phases of design, development and production, are marked by 'X' in Table 36. Where no assessment is required, this is marked by 'n.a.' in the table.

There are no particular assessment procedures required for interoperability constituents of the infrastructure subsystem.

Table 36

Assessment of interoperability constituents for the UK declaration of conformity

Characteristics to be assessed	Assessment in the following phase			
	Design and development phase			Production phase Manufacturing process + product test
	Design review	Review of manufacturing process	Type test	Product quality
5.3.1 The rail				
5.3.1.1 Railhead profile	X	n.a.	X	X
5.3.1.2 Rail steel	X	X	X	X
5.3.2 The rail fastening systems	n.a.	n.a.	X	X
5.3.3 Track sleepers	X	X	n.a.	X

Appendix B Assessment of the infrastructure subsystem

The characteristics of the subsystem to be assessed in the different phases of design, construction and operation are marked by 'X' in Table 37.

Where no assessment by an approved body is required, this is marked by 'n.a.' in the table. This does not prevent the need for other assessments to be performed in the framework of other phases.

Definition of assessment phases:

- (1) **‘Design review’**: it includes checking of correctness of values/parameters against applicable NTSN requirements related to the final design.
- (2) **‘Assembly before putting into service’**: checking on site that the actual product or subsystem complies with the relevant design parameters just before putting it into operation.

Column 3 gives references to [point-clause 6.2.4](#) ‘Particular assessment procedures for subsystem’ and to [point-clause 6.2.5](#) ‘Technical solutions giving presumption of conformity at design stage’.

Table 37

Assessment of the infrastructure subsystem for the UK verification of conformity

Characteristics to be assessed	New line or upgrading/renewal project		Particular assessment procedures
	Design review	Assembly before putting into service	
	1	2	3
Structure gauge (4.2.3.1)	X	X	6.2.4.1
Distance between track centres (4.2.3.2)	X	X	6.2.4.2
Maximum gradients (4.2.3.3)	X	n.a.	
Minimum radius of horizontal curve (4.2.3.4)	X	X	6.2.4.4
Minimum radius of vertical curve (4.2.3.5)	X	n.a.	6.2.4.4
Nominal track gauge (4.2.4.1)	X	X	6.2.4.3
Cant (4.2.4.2)	X	X	6.2.4.4
Cant deficiency (4.2.4.3)	X	n.a.	6.2.4.4 6.2.4.5
Abrupt change of cant deficiency (4.2.4.4)	X	n.a.	6.2.4.4
Assessment of design values for equivalent conicity (4.2.4.5)	X	n.a.	6.2.4.6
Railhead profile for plain line (4.2.4.6)	X	n.a.	6.2.4.7
Rail inclination (4.2.4.7)	X	n.a.	

Characteristics to be assessed	New line or upgrading/renewal project		Particular assessment procedures
	Design review	Assembly before putting into service	
	1	2	
Design geometry of switches and crossings (4.2.5.1)	X	n.a.	6.2.4.8
Use of swing nose crossings (4.2.5.2)	X	n.a.	6.2.4.8
Maximum unguided length of fixed obtuse crossings (4.2.5.3)	X	n.a.	6.2.4.8
Track resistance to vertical loads (4.2.6.1)	X	n.a.	6.2.5
Longitudinal track resistance (4.2.6.2)	X	n.a.	6.2.5 6.2.14.15'
Lateral track resistance (4.2.6.3)	X	n.a.	6.2.5
Resistance of new bridges to traffic loads (4.2.7.1)	X	n.a.	6.2.4.9
Equivalent vertical loading for new earthworks and earth pressure effects (4.2.7.2)	X	n.a.	6.2.4.9
Resistance of new structures over or adjacent to tracks (4.2.7.3)	X	n.a.	6.2.4.9
Resistance of existing bridges and earthworks to traffic loads (4.2.7.4)	X	n.a.	6.2.4.10
The immediate action limit for alignment (4.2.8.1)	n.a.	n.a.	
The immediate action limit for longitudinal level (4.2.8.2)	n.a.	n.a.	
The immediate action limit for track twist (4.2.8.3)	n.a.	n.a.	
The immediate action limit of track gauge as an isolated defect (4.2.8.4)	n.a.	n.a.	
The immediate action limit for cant (4.2.8.5)	n.a.	n.a.	

Characteristics to be assessed	New line or upgrading/renewal project		Particular assessment procedures
	Design review	Assembly before putting into service	
	1	2	
The immediate action limit for switches and crossings (4.2.8.6)	n.a.	n.a.	
Usable length of platforms (4.2.9.1)	X	n.a.	
Platform height (4.2.9.2)	X	X	
Platform offset (4.2.9.3)	X	X	6.2.4.11
Track layout along platforms (4.2.9.4)	X	n.a.	
Maximum pressure variation in tunnels (4.2.10.1)	X	n.a.	6.2.4.12
Effect of crosswinds (4.2.10.2)	n.a.	n.a.	6.2.4.13
Location markers (4.2.11.1)	n.a.	n.a.	
Equivalent conicity in service (4.2.11.2)	n.a.	n.a.	
Toilet discharge (4.2.12.2)	n.a.	n.a.	6.2.4.14
Train external cleaning facilities (4.2.12.3)	n.a.	n.a.	6.2.4.14
Water restocking (4.2.12.4)	n.a.	n.a.	6.2.4.14
Refuelling (4.2.12.5)	n.a.	n.a.	6.2.4.14
Electric shore supply (4.2.12.6)	n.a.	n.a.	6.2.4.14
Application of Interoperability Constituents	n.a.	X	

Appendix C Technical characteristics of track design and switches and crossings design

C.1 Technical characteristics of track design

Track design shall be at least defined by the technical characteristics as follows:

- (a) Rail
 - Profile(s) & grades

- Continuous welded rail or length of rails (for jointed track sections)
- (b) Fastening system
 - Type
 - Pad stiffness
 - Clamping force
 - Longitudinal restraint
- (c) Sleeper
 - Type
 - Resistance to vertical loads:
 - Concrete: design bending moments
 - Wood: compliance to [the specification referenced in Appendix T, index \[15\]](#) ~~EN 13145:2001~~
 - Steel: moment of inertia of cross section
 - Resistance to longitudinal and lateral loads: geometry and weight
 - Nominal and design track gauge
- (d) Rail inclination
- (e) Ballast cross sections (ballast shoulder — ballast thickness)
- (f) Ballast type (grading = granulometrie)
- (g) Sleeper spacing
- (h) Special devices: for example, sleeper anchors, third/fourth rail, ...

C.2 Technical characteristics of switches and crossings design

Switches and crossings design shall be at least defined by the technical characteristics as follows:

- (a) Rail
 - Profile(s) & grades (switch rail, stock rail)
 - Continuous welded rail or length of rails (for jointed track sections)

- (b) Fastening system
 - Type
 - Pad stiffness
 - Clamping force
 - Longitudinal restraint
- (c) Bearer ~~Type~~
 - Type
 - Resistance to vertical loads:
 - Concrete: design bending moments
 - Wood: compliance to [the specification referenced in Appendix T, index \[15\]](#) ~~EN 13145:2001~~
 - Steel: moment of inertia of cross section
 - Resistance to longitudinal and lateral loads: geometry and weight
 - Nominal ~~and design~~ track gauge
- (d) Rail inclination
- (e) Ballast cross sections (ballast shoulder — ballast thickness)
- (f) Ballast type (grading = granulometrie)
- (g) Type of crossing (fixed or movable point)
- (h) Type of locking (switch pannel, movable point of crossing)
- (i) Special devices: for example sleeper anchors, third/fourth rail, ...
- (j) Generic switches and crossings drawing indicating
 - Geometrical diagram (triangle) describing the length of the turnout and the tangents at the end of the turnout
 - Main geometrical characteristics like the main radii in switch, closure and crossing panel, crossing angle
 - Sleeper spacing

Appendix D Conditions of use of track design and switches and crossings design

D.1 Conditions of use of track design

Conditions of use of track design are defined to be as follows:

- (a) Maximum axle load [t]
- (b) Maximum line speed [km/h]
- (c) Minimum horizontal curve radius [m]
- (d) Maximum cant [mm]
- (e) Maximum cant deficiency [mm]

D.2 Conditions of use of switches and crossings design

Conditions of use of switches and crossings design are defined to be as follows:

- (a) Maximum axle load [t]
- (b) Maximum line speed [km/h] on through route and diverging track of switches
- (c) Rules for curved turnouts based on generic designs, giving minimum curvatures (for through route and diverging track of switches)

Appendix E Capability requirements for existing structures according to traffic code

~~The minimum capability requirements for structures are defined in Table 38 and Table 39 according to the traffic codes given in Table 2 and Table 3. The capability requirements are defined in Table 38 and Table 39 by a combined quantity comprising of the EN line category and a corresponding maximum speed. The EN line category and associated speed shall be considered as a single combined quantity.~~ The minimum capability requirements for existing bridges according to clause 4.2.7.4 point (2) are defined in Table 38A and Table 39A according to the traffic codes given in Table 2 and Table 3. These capability requirements are set out using the vertical loading only defined by the EN line category with a corresponding speed or by LM71 with the factor alpha. Additional dynamic capability requirements are expressed by the dynamic load model HSLM. The EN line category and associated speed shall be considered as a single combined quantity.

[The minimum capability requirements for existing earthworks according to point 4.2.7.4 \(2\) are defined in Table 38B and Table 39B according to the traffic codes given in Table 2 and Table 3.](#)

EN line categories ~~is~~ [are](#) a function of axle load and geometrical aspects relating to the spacing of axles. ~~EN line categories and~~ [are set out in the specification referenced in Appendix T, index \[2\] Annex A of EN 15528:2015.](#)

[For continuous bridges the case with most onerous effects between LM71 and Load Model SW/0 shall be taken into account. LM71 \(Load Model 71\), Load Model SW/0 and Load Model HSLM are set out in the specification referenced in Appendix T, index \[10\].](#)

[Note: The Tables 38A, 39A, 38B and 39B do not represent compatibility conditions for vehicles \(for requirements relating to vehicle structure route compatibility conditions see Route Compatibility Check according to Appendix D.1 of the NTSN OPE\).](#)

Table 38A

[Loading capability requirements for bridges and additional requirements due to dynamic effects](#) ~~EN Line Category — Associated Speed~~ ^{(1) (6)} ~~[km/h] — Passenger traffic~~

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾⁽³⁾	Locomotives and Power Heads ⁽²⁾⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾⁽³⁾
P1	n.a. ⁽¹²⁾	n.a. ⁽¹²⁾	Open Point
P2	n.a. ⁽¹²⁾	n.a. ⁽¹²⁾	Open Point
P3a (> 160 km/h)	A — 200 B1 — 160	D2 — 200 ⁽¹¹⁾	Open point
P3b (≤ 160 km/h)	B1 — 160	D2 — 160	E2 ⁽¹⁸⁾ — 160 D2 ⁽⁹⁾ — 120
P4a (> 160 km/h)	A — 200 B1 — 160	D2 — 200 ⁽¹¹⁾	Open point
P4b (≤ 160 km/h)	A — 160 B1 — 140	D2 — 160	B1 ⁽⁷⁾ — 160 C2 ⁽⁸⁾ — 140 D2 ⁽⁹⁾ — 120

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾⁽³⁾	Locomotives and Power Heads ⁽²⁾⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾⁽³⁾
P5	B1-120	C2-120 ⁽⁵⁾	B1 ⁽⁷⁾-120
P6	a12		
P1520	Open point		
P1600	Open point		

<u>Traffic code</u>	<u>Traffic with loco hauled trains: Passenger trains including Carriages (Coaches, Vans and Car Carriers) and Light Freight Wagons and Locomotives and Power Heads ⁽²⁾⁽³⁾⁽⁵⁾⁽⁶⁾⁽⁴⁾</u>	<u>Traffic with Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾⁽⁵⁾⁽⁴⁾</u>
<u>P1</u>	<u>n.a. ⁽⁷⁾</u>	<u>HSLM ⁽⁸⁾</u> <u>D2-200</u> <u>or</u> <u>LM71 with $\alpha = 1.0$ ⁽¹⁴⁾</u>
<u>P2</u>	<u>HSLM ⁽⁸⁾</u> <u>D2-200</u> <u>or</u> <u>LM71 with $\alpha = 0.91$ ⁽¹⁴⁾</u>	<u>HSLM ⁽¹³⁾</u> <u>D2-200</u> <u>or</u> <u>LM71 with $\alpha = 0.91$ ⁽¹⁴⁾</u>
<u>P3a (> 160 km/h)</u>	<u>L \geq4m D2-100</u> <u>and</u> <u>L <4m D2-200 ⁽¹⁰⁾⁽⁹⁾⁽¹⁵⁾</u>	<u>L \geq4m C2-100</u> <u>and</u> <u>L <4m C2-200 ⁽⁹⁾⁽¹⁵⁾</u>
<u>P3b (\leq 160 km/h)</u>	<u>L \geq4m D2-100</u> <u>and</u> <u>L <4m D2-160 ⁽¹¹⁾⁽⁹⁾⁽¹⁵⁾</u>	<u>L \geq4m D2-100</u> <u>and</u> <u>L <4m D2-160 ⁽⁹⁾⁽¹⁵⁾</u>
<u>P4a (> 160 km/h)</u>	<u>L \geq4m D2-100</u> <u>and</u> <u>L <4m D2-200 ⁽¹²⁾⁽⁹⁾⁽¹⁵⁾</u>	<u>L \geq4m C2-100</u> <u>and</u> <u>L <4m C2-200 ⁽⁹⁾⁽¹⁵⁾</u>
<u>P4b (\leq 160 km/h)</u>	<u>L \geq4m D2-100</u>	<u>L \geq4m C2-100</u>

<u>Traffic code</u>	<u>Traffic with loco hauled trains: Passenger trains including Carriages (Coaches, Vans and Car Carriers) and Light Freight Wagons and Locomotives and Power Heads⁽²⁾⁽³⁾⁽⁵⁾⁽⁶⁾⁽⁴⁾</u>	<u>Traffic with Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾⁽⁵⁾⁽⁴⁾</u>
	<u>and</u> <u>L <4m D2-160⁽¹³⁾⁽⁹⁾⁽¹⁵⁾</u>	<u>and</u> <u>L <4m C2-160 ⁽⁹⁾⁽¹⁵⁾</u>
<u>P5</u>	<u>C2-120</u>	<u>B1-120</u>
<u>P6</u>	<u>a12</u>	
<u>P1520</u>	<u>Open point</u>	
<u>P1600</u>	<u>Open point</u>	

Table 39A

Loading capability requirements for bridges expressed by EN Line Category – Associated Speed ~~EN Line Category – Associated Speed~~ ⁽¹⁾⁽⁶⁾ [km/h] – Freight traffic

Traffic code	Freight wagons and other vehicles	Locomotives ⁽²⁾
F1	D4 – 120	D2 – 120
F2	D2 – 120	D2 – 120
F3	C2 – 100	C2 – 100
F4	B2 – 100	B2 – 100
F1520	Open point	
F1600	Open point	

<u>Traffic code</u>	<u>Freight trains including freight wagons, other vehicles and locomotives ⁽²⁾</u>
<u>F1</u>	<u>D4 – 120</u>
<u>F2</u>	<u>D2 – 120</u>
<u>F3</u>	<u>C2 – 100</u>
<u>F4</u>	<u>B2 – 100</u>
<u>F1520</u>	<u>Open point</u>

Traffic code	Freight trains including freight wagons, other vehicles and locomotives ⁽²⁾
F1600	Open point

(1) The indicated speed value in the table represents the maximum requirement for the line and may be lower in accordance with the requirements in point 4.2.1(12). When checking individual structures on the line, it is acceptable to take account of the ~~type of vehicle and~~ local allowed speed.

(2) Passenger Carriages (including Coaches, Vans, Car Carriers), Other Vehicles, Locomotives, Power Heads, Diesel and Electric Multiple Units, Power Units and Railcars are defined in the LOC & PAS NTSN. Light Freight Wagons are defined as vans except that they are allowed to be conveyed in formations which are not intended to convey passengers.

~~(3) The requirements for structures are compatible with Passenger Coaches, Vans, Car Carriers, Light Freight Wagons and vehicles in Diesel and Electric Multiple Units and Power Units with a length of; 18 m to 27,5 m for conventional and articulated vehicles and with a length of 9 m to 14 m for regular single axes.~~

(34) The requirements for structures [set out using EN line categories or load model LM71](#) are compatible with up to two adjacent coupled locomotives and/or power heads. The requirements for structures are compatible with a maximum speed of 120 km/h for three or more adjacent coupled locomotives and/or power heads (or a train of locomotives and/or power heads) subject to the locomotives and/or power heads satisfying the corresponding limits for freight wagons.

~~(45)~~ [For traffic codes P2, P3 and P4 the requirements for both traffic with loco hauled trains and traffic with Multiple Units shall apply.](#) For traffic code P5 the Competent Authority may indicate whether the requirements for locomotives and power heads apply.

~~(6) When checking the compatibility of individual trains and structures, the basis of the compatibility check shall be in accordance with Appendix K to this NTSN. Not used.~~

~~(57a)~~ The requirements for structures are compatible with [carriages, light freight wagons and electric or diesel multiple units with](#) an average mass per unit length over the length of each ~~coach/~~vehicle of [2.45 t/m for EN line category A, 2.75 t/m for EN line category B1, 3.1 t/m for EN line category C2 and 3.5 t/m for EN line category D2 \(not for P5\) 2,75 t/m](#)

~~(8) The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 3,1 t/m~~

~~(9) Deleted.~~

~~(10) This footnote has been left intentionally blank~~

~~(611) The requirements for structures are compatible with 4 axle locomotive and power heads with a spacing of the axles in a bogie of at least 2.6m and the average mass per unit length over the length of the vehicle of up to 5.0t/m. Only 4 axle vehicles allowed. The spacing of the axles in a bogie shall be at least 2,6 m. The average mass per unit length over the length of the vehicle shall not exceed 5,0 t/m.~~

~~(712)~~ Taking into account the state of art of operation there is no need to define harmonized requirements to deliver an adequate level of interoperability for this type of vehicles for P1 ~~and P2~~ traffic codes.

~~(813)~~ [For P1 and P2 lines, compliance with HSLM according to the specification referenced in Appendix T, Index \[10\] shall be stated \(see procedure in clause 6.2.4.10\). If HSLM compliance cannot be shown, for the purpose of dynamic compatibility checks according to the route compatibility check in Appendix D.1 of the NTSN OPE \(RINF parameter 1.1.1.1.2.4.4\), the dynamic loading, to which the compatibility with existing bridges should be checked, shall be provided in the documents with the procedure\(s\) as in RINF parameter 1.1.1.1.2.4.4 \(see also procedure in clause 6.2.4.10\). When a dynamic analysis has to be undertaken with models based on individual trains, the characteristic value of the loading shall be in accordance with the design mass under normal payload in accordance with Appendix K.](#)

~~(914)~~ [For avoiding excessive dynamic effects including resonance, currently it is not possible to specify harmonized minimum bridge properties to obviate the need for a dynamic appraisal. The dynamic loading from vehicles satisfying the bridge static loading requirements \(specified as either a Line Category according to the specification referenced in Appendix T Index \[2\] or in terms of load model LM71\) can in a number of cases exceed these normal bridge static loading](#)

requirements (when these static loadings are enhanced by normal industry allowances for dynamic factors for bridge recalculation or bridge design). This risk to compatibility between vehicles and bridges is managed by the dynamic compatibility checks as in Appendix D.1 of the NTSN OPE (RINF parameter 1.1.1.1.2.4.4). In case dynamic analysis has to be undertaken with models based on individual trains, the characteristic value of the loading shall be in accordance with the design mass under normal payload in accordance with Appendix K.

(1015) The requirements for loco hauled passenger trains are valid for carriages and light freight wagons satisfying EN line category A for speeds up to 200 km/h (local speed) or EN line category C2 for speeds up to 160 km/h (local speed).

(1116) The requirements for loco hauled passenger trains are valid for carriages and light freight wagons coaches satisfying EN line category C2 for speeds up to 160 km/h (local speed).

(1217) The requirements for loco hauled passenger trains are valid for carriages and light freight wagons satisfying line EN category A for speeds up to 200 km/h (local speed) or EN line category B1 for speeds up to 160 km/h (local speed).

(1318) The requirements for loco hauled passenger trains are valid for carriages and light freight wagons satisfying EN line category B1 for speeds up to 160 km/h (local speed).

(1419) The requirements set out using EN line categories or load model LM71 can be fulfilled either via EN line category with the corresponding speed or with LM71 with the factor alpha according to the specification referenced in Appendix T, index [10]. The decision between the two available options, not necessarily the most onerous, is to be made exclusively by the applicant. EN line category with the corresponding speed is based on static loading multiplied by a dynamic amplification factor.

(1520) Where the minimum capability requirements for a traffic code given in Table 38A are given for example in the form $L \geq 4m$ D2-100* and $L < 4m$ D2-200** the relevant criteria according to the loaded length L of the bridge element being considered shall be satisfied. EN line category with the corresponding speed is based on static loading multiplied by a dynamic amplification factor.

*For local allowable speeds up to 100km/h the minimum required loading capability is D2 at the local allowable speed. For local allowable speeds exceeding 100km/h the minimum required loading capability is D2 at 100km/h.

** For local allowable speeds up to 200km/h the minimum required loading capability is D2 at the local allowable speed.

Notes 4, 5, 7a, 11, 12, 15, 16, 17 and 18 are only informative.

Table 38B

Loading capability requirements for earthworks ^{(1) (2)}

Passenger traffic

<u>Traffic code</u>	<u>Traffic with loco hauled trains: Passenger trains including Carriages (Coaches, Vans and Car Carriers) and Light Freight Wagons and Locomotives and Power Heads⁽³⁾</u>	<u>Traffic with Electric or Diesel Multiple Units, Power Units and Railcars ⁽³⁾</u>
<u>P1</u>	<u>n.a.⁽⁴⁾</u>	<u>D2</u>
<u>P2</u>	<u>D2</u>	<u>D2</u>
<u>P3a (> 160 km/h)</u>	<u>D2</u>	<u>C2</u>
<u>P3b (≤ 160 km/h)</u>	<u>D2</u>	<u>D2</u>

<u>Traffic code</u>	<u>Traffic with loco hauled trains: Passenger trains including Carriages (Coaches, Vans and Car Carriers) and Light Freight Wagons and Locomotives and Power Heads⁽³⁾</u>	<u>Traffic with Electric or Diesel Multiple Units, Power Units and Railcars⁽³⁾</u>
<u>P4a (> 160 km/h)</u>	<u>D2</u>	<u>C2</u>
<u>P4b (≤ 160 km/h)</u>	<u>D2</u>	<u>C2</u>
<u>P5</u>	<u>C2</u>	<u>B1</u>
<u>P6</u>	<u>a12</u>	
<u>P1520</u>	<u>Open point</u>	
<u>P1600</u>	<u>Open point</u>	

Table 39B

Loading capability requirements for earthworks

Freight traffic⁽²⁾

<u>Traffic code</u>	<u>Freight trains including freight wagons, other vehicles and locomotives⁽²⁾</u>
<u>F1</u>	<u>D4</u>
<u>F2</u>	<u>D2</u>
<u>F3</u>	<u>C2</u>
<u>F4</u>	<u>B2</u>
<u>F1520</u>	<u>Open point</u>
<u>F1600</u>	<u>Open point</u>

(1) The published line categories of the section of line including earthworks take account of the local allowed speeds.

(2) Passenger Carriages (including Coaches, Vans, Car Carriers), Other Vehicles, Locomotives, Power Heads, Diesel and Electric Multiple Units, Power Units and Railcars are defined in section 2.2 of the LOC & PAS NTSN. Light Freight Wagons are defined as vans except that they are allowed to be conveyed in formations which are not intended to convey passengers.

(3) For traffic codes P2, P3 and P4 the requirements for both traffic with loco hauled trains and traffic with Multiple Units shall apply. For traffic code P5 the Competent Authority may indicate whether the requirements for locomotives and power heads apply.

(4) Taking into account the state of art of operation there is no need to define harmonized requirements to deliver an adequate level of interoperability for this type of vehicles for P1 traffic codes.

[Notes 3 and 4 are only informative.](#)

Appendix F Capability requirements for structures according to traffic codes in Great Britain

The minimum capability requirements for structures are defined in Table 40 and Table 41 according to the traffic codes given in Table 2 and Table 3. The capability requirements are defined in Table 40 and Table 41 by a combined quantity comprising of the Route Availability number and a corresponding maximum speed. The Route Availability number and associated speed shall be considered as a single combined quantity.

The Route Availability number is a function of axle load and geometrical aspects relating to the spacing of axles. Route Availability numbers are defined in the national technical rules notified for this purpose.

Table 40

Route Availability number — Associated Speed ⁽¹⁾ ⁽⁵⁾ [miles per hour] — Passenger traffic

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾ ⁽³⁾ ⁽⁶⁾	Locomotives and Power Heads ⁽²⁾ ⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾ ⁽³⁾ ⁽⁶⁾
P1	n.a. ⁽¹¹⁾	n.a. ⁽¹¹⁾	Open Point
P2	n.a. ⁽¹¹⁾	n.a. ⁽¹¹⁾	Open Point
P3a (> 160 km/h)	RA1 – 125 RA2 – 90	RA7 – 125 ⁽⁷⁾ RA8 – 110 ⁽⁷⁾ RA8 – 100 ⁽⁸⁾ RA5 – 125 ⁽⁹⁾	Open point
P3b (≤ 160 km/h)	RA1 – 100 RA2 – 90	RA8 – 100 ⁽⁸⁾ RA5 – 100 ⁽⁹⁾	RA3 – 100
P4a (> 160 km/h)	RA1 – 125 RA2 – 90	RA7 – 125 ⁽⁷⁾ RA7 – 100 ⁽⁸⁾ RA4 – 125 ⁽⁹⁾	Open point
P4b (≤ 160 km/h)	RA1 – 100	RA7 – 100 ⁽⁸⁾	RA3 – 100

Traffic code	Passenger Carriages (including Coaches, Vans and Car Carriers) and Light Freight Wagons ⁽²⁾ ⁽³⁾ ⁽⁶⁾	Locomotives and Power Heads ⁽²⁾ ⁽⁴⁾	Electric or Diesel Multiple Units, Power Units and Railcars ⁽²⁾ ⁽³⁾ ⁽⁶⁾
	RA2 – 90	RA4 – 100 ⁽⁹⁾	
P5	RA1 – 75	RA5 – 75 ⁽⁸⁾ ⁽¹⁰⁾ RA4 – 75 ⁽⁹⁾ ⁽¹⁰⁾	RA3 – 75
P6	RA1		
P1600	Open point		

Table 41

Route Availability number — Associated Speed ⁽¹⁾ ⁽⁵⁾ [miles per hour] — Freight traffic

Traffic code	Freight wagons and other vehicles	Locomotives ⁽²⁾ ⁽⁴⁾ ⁽⁸⁾
F1	RA8 – 75	RA7 – 75
F2	RA7 – 75	RA7 – 75
F3	RA5 – 60	RA7 – 60
F4	RA4 – 60	RA5 – 60
F1600	Open point	

(1) The indicated speed value in the table represents the maximum requirement for the line and may be lower in accordance with the requirements in point 4.2.1(12). When checking individual structures on the line, it is acceptable to take account of the type of vehicle and local allowed speed.

(2) Passenger Carriages (including Coaches, Vans, Car Carriers), Other Vehicles, Locomotives, Power Heads, Diesel and Electric Multiple Units, Power Units and Railcars are defined in the LOC & PAS NTSN. Light Freight Wagons are defined as vans except that they are allowed to be conveyed in formations which are not intended to convey passengers.

(3) The requirements for structures are compatible with Passenger Coaches, Vans, Car Carriers, Light Freight Wagons and vehicles in Diesel and Electric Multiple Units and Power Units with a length of; 18 m to 27,5 m for conventional and articulated vehicles and with a length of 9 m to 14 m for regular single axles.

(4) The requirements for structures are compatible with up to two adjacent coupled locomotives and/or power heads. The requirements for structures are compatible up to a maximum speed of 75 mph for up to five adjacent coupled locomotives and/or power heads (or a train of locomotives and/or power heads) subject to the locomotives and/or power heads satisfying the corresponding limits for freight wagons.

(5) When checking the compatibility of individual trains and structures, the basis of the compatibility check shall be in accordance with Appendix K except where modified by the national technical rules notified for this purpose.

(6) The requirements for structures are compatible with an average mass per unit length over the length of each coach/vehicle of 3,0 t/m

(7) Only 4 axle vehicles allowed. The spacing of the axles in a bogie shall be at least 2,6 m. The average mass per unit length over the length of the vehicle shall not exceed 4,6 t/m.

(8) 4 or 6 axle vehicles allowed.

(9) Powerhead, only 4 axle vehicles allowed. Also includes locomotives where difference in length between locomotive and hauled vehicles is less than 15 % of length of hauled vehicles for speeds over 90 mph.

(10) For traffic code P5 the Competent Authority may indicate whether the requirements for locomotives and power heads apply.

(11) Taking into account the state of art of operation there is no need to define harmonized requirements to deliver an adequate level of interoperability for this type of vehicles for P1 and P2 traffic codes.

Appendix G Speed conversion to miles per hour for Great Britain

Table 42

Speed conversion from [km/h] to [mph]

Speed [km/h]	Speed [mph]
2	1
3	1
5	3
10	5
15	10
20	10
30	20
40	25
50	30
60	40
80	50
100	60
120	75
140	90

Speed [km/h]	Speed [mph]
150	95
160	100
170	105
180	110
190	120
200	125
220	135
225	140
230	145
250	155
280	175
300	190
320	200
350	220

Appendix H *This Appendix has been left intentionally blank.*

Appendix I Not Used **Reverse curves with radii in the range from 150 m up to 300 m**

~~The values in Table 43 are based on a reference vehicle (basic passenger coach with a distance between bogie pivots $a = 19$ m and distance between the buffer face and the bogie pivot $nt = 3,7$ m, buffer width $\Delta = 635$ mm and transversal play of the vehicle $w = +/- 60$ mm) and an end throw difference of 395 mm for two adjacent basic passenger coaches.~~

~~The values in Table 44 are based on a reference vehicle (basic freight wagon with a distance between end axles or bogie pivots 12 m and distance between the buffer face and the end axle or bogie pivot 3 m) and an end throw difference of 225 mm for two adjacent basic freight wagons.~~

~~Due to local settings it can be necessary to require a longer length of the intermediate element or special operational conditions or a bigger width of the buffer to prevent buffer locking for existing vehicles that do not fulfil these assumptions.~~

Table 43

Minimum length of a straight intermediate element between two long circular curves in the opposite directions [m]

R1 R2	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220
150	10,78	10,53	10,29	10,06	9,83	9,6	9,38	9,16	8,94	8,73	8,52	8,31	8,11	7,91	7,71
160	10,29	9,86	9,48	9,22	8,97	8,73	8,49	8,25	8,02	7,79	7,56	7,34	7,12	6,91	6,69
170	9,83	9,37	8,97	8,62	8,3	8,04	7,78	7,53	7,28	7,04	6,8	6,55	6,31	6,06	5,81
180	9,38	8,91	8,49	8,12	7,78	7,48	7,2	6,93	6,65	6,37	6,08	5,79	5,49	5,18	4,86
190	8,94	8,45	8,02	7,63	7,28	6,96	6,65	6,33	6	5,67	5,33	4,97	4,59	4,19	3,76
200	8,52	8,01	7,56	7,16	6,8	6,44	6,08	5,71	5,33	4,93	4,5	4,04	3,54	2,97	2,28
210	8,11	7,59	7,12	6,7	6,31	5,91	5,49	5,06	4,59	4,09	3,54	2,91	2,11	0,73	0
220	7,71	7,17	6,69	6,25	5,81	5,35	4,86	4,34	3,76	3,1	2,28	0,95	0	0	0
230	7,32	6,77	6,27	5,79	5,29	4,76	4,18	3,52	2,74	1,67	0	0	0	0	0
240	6,95	6,38	5,85	5,32	4,74	4,11	3,38	2,5	1,07	0	0	0	0	0	0
250	6,58	5,99	5,42	4,81	4,14	3,36	2,39	0,51	0	0	0	0	0	0	0
260	6,22	5,6	4,97	4,26	3,46	2,44	0,36	0	0	0	0	0	0	0	0
270	5,86	5,2	4,48	3,66	2,64	0,86	0	0	0	0	0	0	0	0	0
280	5,51	4,78	3,96	2,96	1,45	0	0	0	0	0	0	0	0	0	0
290	5,15	4,33	3,37	2,06	0	0	0	0	0	0	0	0	0	0	0
300	4,77	3,85	2,68	0	0	0	0	0	0	0	0	0	0	0	0
310	4,37	3,31	1,75	0	0	0	0	0	0	0	0	0	0	0	0
320	3,95	2,67	0	0	0	0	0	0	0	0	0	0	0	0	0
330	3,47	1,85	0	0	0	0	0	0	0	0	0	0	0	0	0
340	2,94	0	0	0	0	0	0	0	0	0	0	0	0	0	0
350	2,3	0	0	0	0	0	0	0	0	0	0	0	0	0	0
360	1,41	0	0	0	0	0	0	0	0	0	0	0	0	0	0
370	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
380	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Table 44

Limits, for dedicated freight lines, for the length of a straight intermediate element between two long circular curves in the opposite directions [m]

R1 R2	150	155	160	165	170	175	180	185	190	195	200
150	6,79	6,61	6,43	6,25	6,09	5,92	5,76	5,60	5,44	5,28	5,13
160	6,43	6,20	6,01	5,82	5,63	5,45	5,26	5,07	4,89	4,70	4,51
170	6,09	5,85	5,63	5,42	5,20	4,98	4,76	4,54	4,31	4,08	3,84
180	5,76	5,51	5,26	5,01	4,76	4,51	4,25	3,98	3,70	3,40	3,09
190	5,44	5,16	4,89	4,60	4,31	4,01	3,70	3,36	3,01	2,61	2,15
200	5,13	4,82	4,51	4,18	3,84	3,48	3,09	2,65	2,15	1,51	0
210	4,82	4,47	4,11	3,73	3,32	2,88	2,37	1,73	0,68	0	0
220	4,50	4,11	3,69	3,25	2,75	2,15	1,35	0	0	0	0
230	4,17	3,73	3,24	2,70	2,04	1,07	0	0	0	0	0
240	3,83	3,32	2,74	2,04	0,96	0	0	0	0	0	0
250	3,47	2,87	2,15	1,07	0	0	0	0	0	0	0
260	3,08	2,36	1,35	0	0	0	0	0	0	0	0
270	2,65	1,73	0	0	0	0	0	0	0	0	0
280	2,16	0,68	0	0	0	0	0	0	0	0	0
290	1,51	0	0	0	0	0	0	0	0	0	0
300	0	0	0	0	0	0	0	0	0	0	0

Appendix J Safety assurance over fixed obtuse crossings


(J.1) The fixed obtuse crossings should be designed in order not to have a too long unguided length. In obtuse crossing check rails cannot be constructed to assure guidance over the whole length. This unguided length can be accepted up to a certain limit, defined by a reference situation defining:

- (a) Minimum crossing angle: tangent 1 in 9 ($\text{tg}\alpha = 0,11$, $\alpha = 6^{\circ}20'$)
- (b) Minimum radius through obtuse crossing: 450 m

- (c) Minimum height of check rail: 45 mm
- (d) Nose shape as defined in the figure below

Figure 6


Obtuse crossing

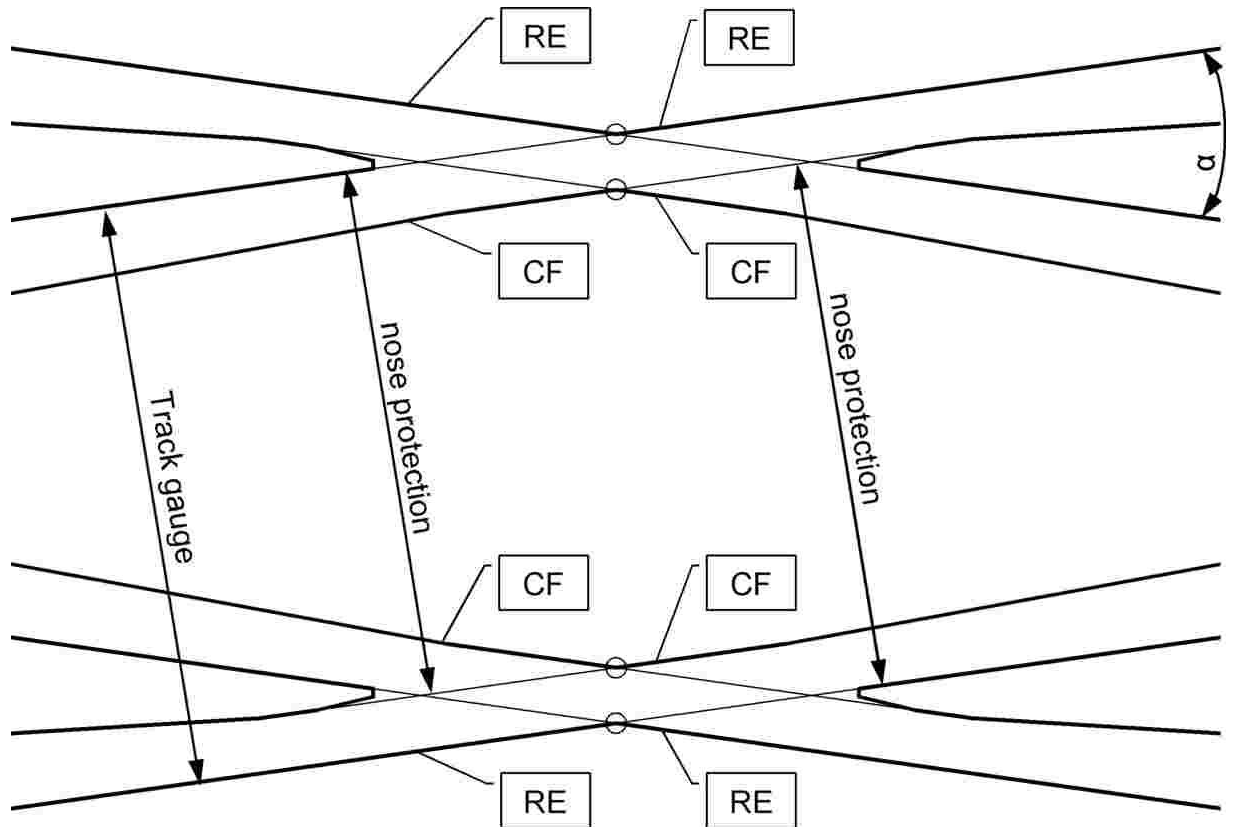

RE = running edge
CF = check face (guiding edge)

Figure 7

Point retraction X on check face

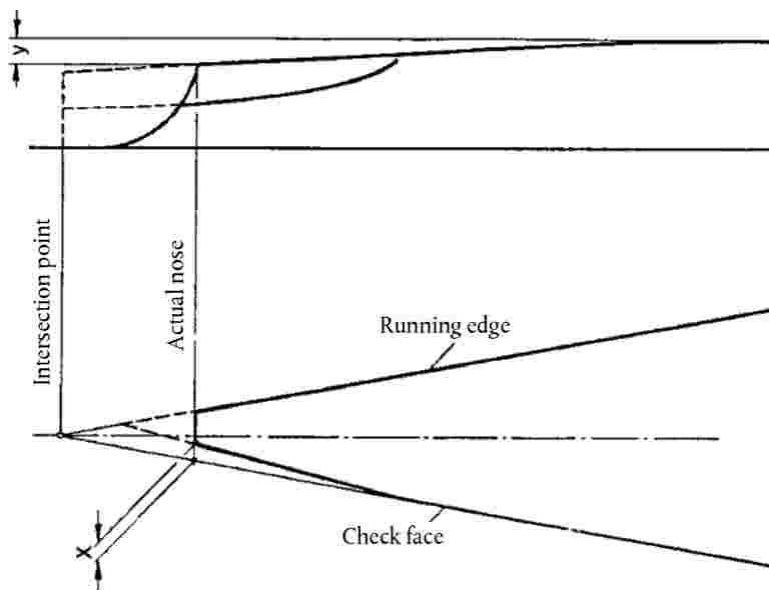

X = 3 mm (over a length of 150 mm).

Y = 8 mm (over a length of 200 to 500 mm approximately)

- (J.2) If one or more of the above requirements is not respected, the design shall be checked, verifying either the equivalence of the unguided length or acceptance of the interference between wheel and nose when they get in contact.
- (J.3) The design shall be checked for wheels with diameter between 630 mm and 840 mm. For wheel diameters between 330 mm and 630 mm specific demonstrations are required.
- (J.4) The following graphs allow simple verification of unguided length for specific situation with different crossing angles, height of check rail and different crossing curvature.

The graphs consider the following maximum track tolerances:

- (a) Track gauge between 1 433 mm and 1 439 mm inclusive
- (b) Nose protection between 1 393 mm and 1 398 mm inclusive
- (c) Free wheel passage \leq 1 356 mm


Figure 8 allows to specify the minimum wheel diameter that can run on curved obtuse crossings with a radius of 450 m, Figure 9 allows it for straight obtuse crossings.

For other situations specific calculations can be performed.

(J.5) For track gauge systems other than 1 435 mm, specific calculations shall be performed.

Figure 8


Minimum wheel diameter against crossing angle for 450 m radius of obtuse crossing

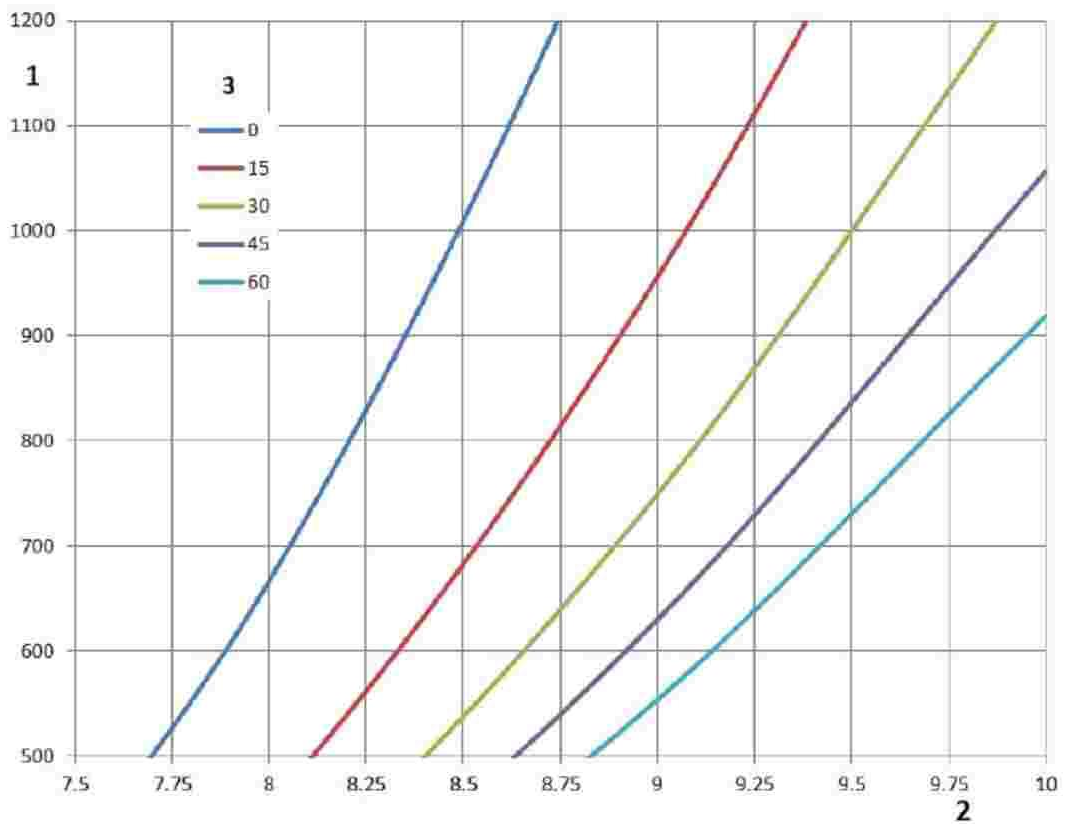

- 1 Minimum wheel diameter [mm]
- 2 N for crossing angle tangent 1 in N
- 3 Height of check rail [mm] (Z3)

Figure 9

Minimum wheel diameter against crossing angle for straight obtuse crossing

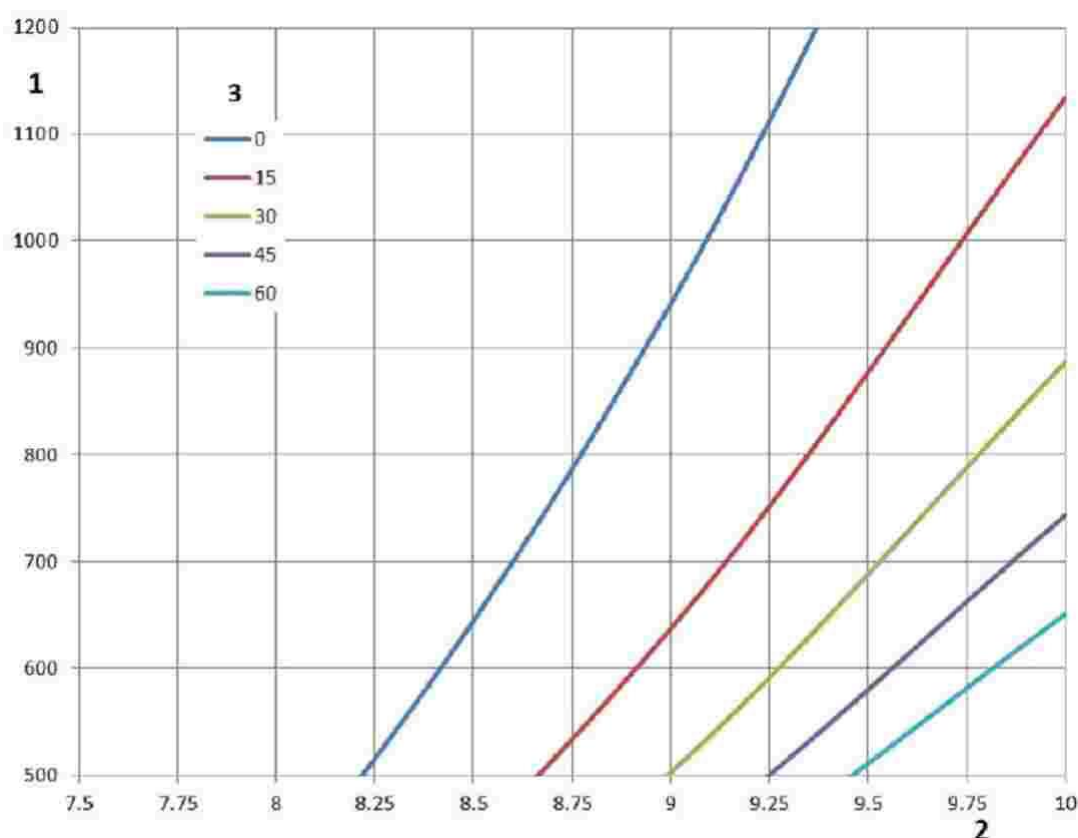

- 1 Minimum wheel diameter [mm]
- 2 N for crossing angle tangent 1 in N
- 3 Height of check rail [mm] (Z3)

Appendix K Basis of minimum requirements for structures for passenger coaches and multiple units

The following mass definitions for passenger carriages and multiple units form the basis of the minimum dynamic requirements for structures and checking the compatibility of structures with passenger coaches and multiple units.

~~The EN line categories in Appendix E are based upon the design mass under exceptional payload according to section 2.1 of EN 15663:2009+AC:2010 taking the values for passenger payload in standing areas given in Table 45 into account.~~

Where checks on the dynamic response of rail bridges are required to specify the load carrying capacity of the bridge, the load capacity of the bridge should be

specified and expressed in terms of the design mass under normal payload according to [the specification referenced in Appendix T, index \[1\]](#) ~~section 2.1 of EN 15663:2009+AC:2010~~ taking the values for passenger payload in standing areas given in Table 45 into account.

[Mass definitions for static compatibility based upon the design mass under exceptional payload according to the specification referenced in Appendix T index \[1\] with regard to the specification referenced in Appendix T index \[2\].](#)

Table 45

Passenger payload in standing areas in kg/m² [according to the specification referenced in Appendix T index \[1\]](#)

Type of trains	Normal payload to specify Dynamic Compatibility	Exceptional payload to specify Line-Category (Static Compatibility)
High speed and long distance trains Table 3 in EN 15663:2009+AC:2010	160 ⁽¹⁾	320
High speed and long distance trains Reservation Obligatory Table 3 in EN 15663:2009+AC:2010	0	320
Others (regional, commuter, suburban trains) Table 4 in EN 15663:2009+AC:2010	280	500 ⁽²⁾

Notes

(1) Normal payload of ~~Table 3 of EN 15663: 2009+AC:2010~~ [the specification referenced in Appendix T index \[1\]](#) plus an additional 160 kg/m² for standing areas

~~(2) For certain types of commuter services (e.g. RATP Paris) the passenger payload in standing areas is 700 kg/m²~~

Appendix L Deleted

Appendix M This Appendix has been left intentionally blank.

Appendix N This Appendix has been left intentionally blank.

Appendix O This Appendix has been left intentionally blank.

Appendix P This Appendix has been left intentionally blank.

Appendix Q National technical rules for UK Specific Cases

The National Technical Rules for UK specific cases referred to in point 7.7.17 of this NTSN are contained in the documents listed in Table 47. All documents are available on www.rgsonline.co.uk.

Table 47

Notified national technical rules for UK Specific Cases

Specific Case	NTSN Point	Requirement	NTR Ref	NTR Title
7.7.17.1	4.2.1: Table 2 & Table 3	Categories of line: Gauge	GI/RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances
			GE/RT8073	Requirements for the Application of Standard Vehicle Gauges
			GI/RT7020	GB Requirements for Platform Height, Platform Offset and Platform Width
			GI/RT7073	Requirements for the Position of Infrastructure and for

7.7.17.2 & 7.7.17.9	4.2.3.1 & 6.2.4.1	Structure gauge		Defining and Maintaining Clearances
			GE/RT8073	Requirements for the Application of Standard Vehicle Gauges
			GI/RT7020	GB Requirements for Platform Height, Platform Offset and Platform Width
7.7.17.3 & 7.7.17.10	4.2.3.2: Table 4 & 6.2.4.2	Distance between track centres	GI/RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances
7.7.17.4	4.2.5.3 & Appendix J	Maximum unguided length of fixed obtuse crossings	GC/RT5021	Track System Requirements
			GM/RT2466	Railway Wheelsets
7.7.17.6	4.2.9.2	Platform height	GI/RT7020	GB Requirements for Platform Height, Platform Offset and Platform Width
7.7.17.7 & 7.7.17.11	4.2.9.3 & 6.2.4.11	Platform offset	GI/RT7020	GB Requirements for Platform Height, Platform Offset and Platform Width
			GI/RT7073	Requirements for the Position of Infrastructure and for Defining and Maintaining Clearances

Appendix R List of open points

- (1) Immediate action limits for isolated defects in alignment for speeds of more than 300 km/h (4.2.8.1).
- (2) Immediate action limits for isolated defects in longitudinal level for speeds of more than 300 km/h (4.2.8.2).
- (3) The minimum allowed value of distance between track centres for the uniform structure gauge IRL3 is an open point (7.7.18.2).

- (4) ~~EN Line Category — Associated Speed [km/h] for Traffic codes P1 (multiple units), P2 (multiple units), P3a (multiple units), P4a (multiple units), P1520 (all vehicles), P1600 (all vehicles), F1520 (all vehicles) and F1600 (all vehicles) in Appendix E, Tables 38 and 39.~~
- (5) Route Availability Number — Associated Speed [miles/h] for Traffic codes P1 (multiple units), P2 (multiple units), P3a (multiple units), P4a (multiple units), P1600 (all vehicles) and F1600 (all vehicles) in Appendix F, Tables 40 and 41.
- (6) *This provision has been left intentionally blank*
- (7) The requirements for mitigating the risk for ballast pick up for speed greater than 250 km/h.

Appendix S Glossary

Table 48

Terms

Defined term	NTSN point clause	Definition
Actual point (RP)	4.2.8.6	Physical end of a crossing vee. See Figure 2, which shows the relationship between the actual point (RP) and the intersection point (IP).
Alert limit	4.5.2	Refers to the value which, if exceeded, requires that the track geometry condition is analysed and considered in the regularly planned maintenance operations.
Axle load	4.2.1, 4.2.6.1	Sum of the static vertical wheel forces exerted on the track through a wheelset or a pair of independent wheels divided by acceleration of gravity.
Braking systems independent of wheel-rail adhesion conditions	4.2.6.2.2	“Braking systems independent of wheel – rail adhesion conditions” refers to all brake systems of the rolling stock capable to develop a brake force applied to the rails independently of the wheel – rail adhesion conditions (e.g. magnetic braking systems and eddy current braking systems)

Defined term	NTSN point clause	Definition
Cant	4.2.4.2 4.2.8.5	Difference in height, relative to the horizontal, of the two rails of one track at a particular location, measured at the centrelines of the heads of the rails.
Cant deficiency	4.2.4.3	Difference between the applied cant and a higher equilibrium cant.
Common crossing	4.2.8.6	Arrangement ensuring intersection of two opposite running edges of turnouts or diamond crossings and having one crossing vee and two wing rails.
Crosswind	4.2.10.2	Strong wind blowing laterally to a line which may adversely affect the safety of trains running.
Design value	4.2.3.4, 4.2.4.2, 4.2.4.5, 4.2.5.1, 4.2.5.3	Theoretical value without manufacturing, construction or maintenance tolerances.
Design track gauge	5.3.3	A single value which is obtained when all the components of the track conform precisely to their design dimensions or their median design dimension when there is a range.
Distance between track centres	4.2.3.2	The distance between points of the centre lines of the two tracks under consideration, measured parallel to the running surface of the reference track namely the less canted track.
Dynamic lateral force	4.2.6.3	The sum of dynamic forces exerted by a wheelset on the track in lateral direction.
Earthworks	4.2.7.2, 4.2.7.4	Soil structures and soil-retaining structures that are subject to railway traffic loading.
EN Line Category	4.2.7.4, Appendix E	The result of the classification process set out in the specification referenced in Appendix T index [2] EN 15528:2015 Annex A and referred to in that standard as “Line Category”. It represents the ability of the infrastructure to withstand the vertical loads imposed by vehicles on the line or section of line for regular (“normal”) service.

Defined term	NTSN point clause	Definition
Equivalent conicity	4.2.4.5, 4.2.11.2	The tangent of the cone angle of a wheelset with coned wheels whose lateral movement has the same kinematic wavelength as the given wheelset on straight track and large-radius curves.
Fixed nose protection	4.2.5.3, Appendix J	Dimension between the crossing nose and check rail (see dimension No 2 on Figure 1410 below).
Flangeway depth	4.2.8.6	Dimension between the running surface and the bottom of flangeway (see dimension No 6 on Figure 1410 below).
Flangeway width	4.2.8.6	Dimension between a running rail and an adjacent check or wing rail (see dimension No 5 on Figure 1410 below).
Free wheel passage at check rail/wing rail entry	4.2.8.6	Dimension between the working face of the crossing check rail or wing rail and the gauge face of the running rail opposite across the gauge measured at entry to check rail or wing rail respectively. (see dimensions No 4 on Figure 1410 below). The entry to the check rail or wing rail is the point at which the wheel is allowed to contact the check rail or wing rail.
Free wheel passage at crossing nose	4.2.8.6	Dimension between the working face of the crossing wing rail and check rail opposite across the gauge (see dimension No 3 on Figure 1410 below).
Free wheel passage in switches	4.2.8.6.	Dimension from the gauge face of one switch rail to the back edge of the opposite switch rail (see dimension No 1 on Figure 1410 below).
Gauge	4.2.1, 4.2.3.1	Set of rules including a reference contour and its associated calculation rules allowing definition of the outer dimensions of the vehicle and the space to be cleared by the infrastructure.
HBW	5.3.1.2	The non SI unit for steel hardness defined in the specification referenced in Appendix T index [16] EN ISO 6506 1:2005 Metallic materials—Brinell hardness test. Test method.
Height of check rail	4.2.8.6, Appendix J	Height of the check rail above the running surface (see dimension 7 on Figure 14 below).

Defined term	NTSN point clause	Definition
Immediate Action Limit	4.2.8, 4.5	The value which, if exceeded, requires taking measures to reduce the risk of derailment to an acceptable level.
Infrastructure Manager	4.2.5.1, 4.2.8.3, 4.2.8.6, 4.2.11.2 4.4, 4.5.2, 4.6, 4.7, 6.2.2.1, 6.2.4, 6.4	Any body or undertaking that is responsible in particular for establishing and maintaining railway infrastructure. This may also include the management of infrastructure control and safety systems. The functions of the infrastructure manager on a network or part of a network may be allocated to different bodies or undertakings.
In service value	4.2.8.5, 4.2.11.2	Value measured at any time after the infrastructure has been placed into service.
Intersection point (IP)	4.2.8.6	Theoretical intersection point of the running edges at the centre of the crossing (see figure 2).
Intervention Limit	4.5.2	The value, which, if exceeded, requires corrective maintenance in order that the immediate action limit shall not be reached before the next inspection;
Isolated defect	4.2.8	A discrete track geometry fault.
Line speed	4.2.1	Maximum speed for which a line has been designed.
Maintenance file	4.5.1	Elements of the technical file relating to conditions and limits of use and instructions for maintenance.
Maintenance plan	4.5.2	A series of documents setting out the infrastructure maintenance procedures adopted by an Infrastructure Manager.
Multi-rail track	4.2.2.2	Track with more than two rails, where at least two pairs of respective rails are designed to be operated as separate single tracks, with or without different track gauges.
Nominal track gauge	4.2.4.1	A single value which identifies the track gauge but may differ from the design track gauge.
Normal service	4.2.2.2 4.2.9	The railway operating to a planned timetable service.
Passive provision	4.2.9	Provision for the future construction of a physical extension to a structure (for example: increased platform length).


Defined term	NTSN point clause	Definition
Performance Parameter	4.2.1	Parameter describing an NTSN Category of Line used as the basis for the design of infrastructure subsystem elements and as the indication of the performance level of a line.
Plain line	4.2.4.5 4.2.4.6 4.2.4.7	Section of track without switches and crossings.
Point retraction	4.2.8.6	The reference line in a fixed common crossing can deviate from the theoretical reference line. From a certain distance to the crossing point, the reference line of the vee can, depending on the design, be retracted from this theoretical line away from the wheel flange in order to avoid contact between both elements. This situation is described in Figure 2.
Rail inclination	4.2.4.5 4.2.4.7	An angle defining the inclination of the head of a rail when installed in the track relative to the plane of the rails (running surface), equal to the angle between the axis of symmetry of the rail (or of an equivalent symmetrical rail having the same rail head profile) and the perpendicular to the plane of the rails.
Rail pad	5.3.2	A resilient layer fitted between a rail and the supporting sleeper or baseplate.
Reverse curve	4.2.3.4	Two abutting curves of opposite flexure or hand
Structure gauge	4.2.3.1	Defines the space in relation to the reference track that shall be cleared of all objects or structures and of the traffic on the adjacent tracks, in order to allow safe operation on the reference track. It is defined on the basis of the reference contour by application of the associated rules.
Swing nose	4.2.5.2	Within the domain of “common crossing with movable point”, the term “swing nose” identifies the part of the crossing which forms the vee and that it is moved to form a continuous running edge for either the main or the branch line.

Defined term	NTSN point clause	Definition
Switch	4.2.8.6	A unit of track comprising two fixed rails (stock rails) and two movable rails (switch rails) used to direct vehicles from one track to another track.
Switches and crossings	4.2.4.5, 4.2.4.7, 4.2.5, 4.2.6, 4.2.8.6, 5.2, 6.2.4.4, 6.2.4.8, 6.2.5.2, 7.3.3, Appendix C and D,	Track constructed from sets of switches and individual crossings and the rails connecting them.
Through route	Appendix D	In the context of switches and crossings a route which perpetuate the general alignment of the track.
Track design	4.2.6, 6.2.5, Appendix C and D	The track design consists of cross-section defining basic dimensions and track components (for example rail, rail fastenings, sleepers, ballast) used together with operating conditions with an impact on forces related to 4.2.6, such as axle load, speed and radius of horizontal curvature.
Track gauge	4.2.4.1, 4.2.4.5, 4.2.8.4, 5.3.3, 6.1.5.2, 6.2.4.3, Appendix H	The smallest distance between lines perpendicular to the running surface intersecting each rail head profile in a range from 0 to 14 mm below the running surface.
Track twist	4.2.7.1.6, 4.2.8.3, 6.2.4.9,	Track twist is defined as the algebraic difference between two cross levels taken at a defined distance apart, usually expressed as a gradient between the two points at which the cross level is measured.
Train length	4.2.1	The length of a train, which can run on a certain line in normal operation.
Unguided length of an obtuse crossing	4.2.5.3, Appendix J	Portion of obtuse crossing where there is no guidance of the wheel described as “unguided distance length ” in the specification referenced in Appendix T, index [17] EN-13232-3:2003 .

Defined term	NTSN point clause	Definition
Usable length of a platform	4.2.1, 4.2.9.1	The maximum continuous length of that part of platform in front of which a train is intended to remain stationary in normal operating conditions for passengers to board and alight from the train, making appropriate allowance for stopping tolerances. Normal operating conditions means that railway is operating in a non-degraded mode (e.g. rail adhesion is normal, signals are working, everything is working as planned).

Figure 14

Geometry of switches and crossings

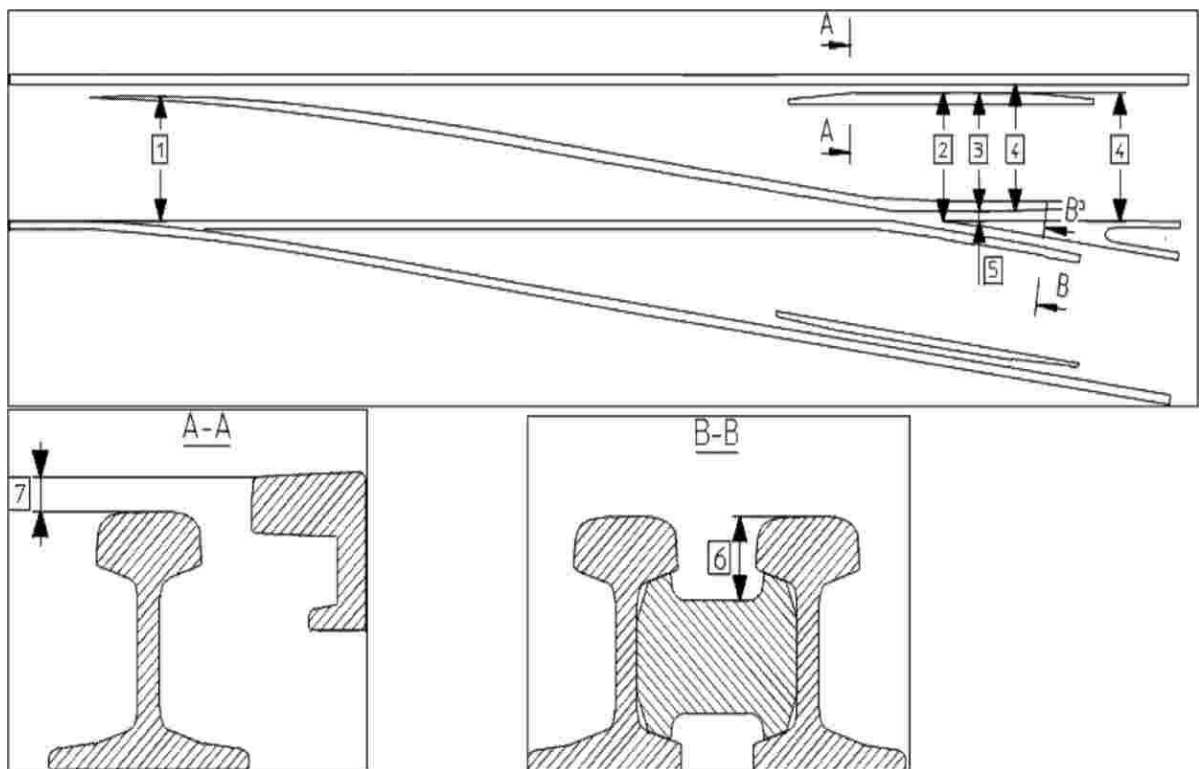

- (1) 1 Free wheel passage in switches
- (2) Fixed nose protection
- (3) Free wheel passage at crossing nose
- (4) Free wheel passage at check rail/wing rail entry
- (5) Flangeway width

- (6) Flangeway depth
- (7) Height of check rail

Appendix T List of referenced standards

Table 49

List of referenced standards

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
[1]	Railway applications – Vehicle reference masses	EN 15663	2017+A1:2018
[1.1]	Mass definition of rolling stock	4.2.1 (7) table 2 Appendix K	4.5
[1.2]	Mass definition of rolling stock	4.2.1 (7) table 3	4.5 and 7.4
[1.3]	Passenger payload for high speed and long distance trains	Appendix K, table 45	Table 7
[1.4]	Passenger payload for other trains	Appendix K, table 45	Table 8
[2]	Railway applications – Line categories for managing the interface between load limits of vehicles and infrastructure	EN 15528	2021
[2.1]	Mass definition of rolling stock	4.2.1 (7) table 2 Appendix K	6.4
[2.2]	Capability requirements for existing structures according to traffic code	Appendix E	Annex A
[2.3]	Line categories	Appendix E – note 14	
[2.4]	Definition of line category	Appendix S	5
[3]	Railway applications – Gauges – Part 3: structure gauges	EN 15273-3	2013

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
[3.1]	Structure gauge	4.2.3.1 (1)	Annex C and in Annex D, point D.4.8
[3.2]	Structure gauge	4.2.3.1 (2)	Annex C
[3.3]	Structure gauge Assessment	4.2.3.1 (3) 6.2.4.1	5, 7, 10 Annex C and in Annex D, point D.4.8
[3.4]	Distance between track centres Assessment	4.2.3.2 (3) 6.2.4.2	9
[3.5]	Platform offset Assessment	4.2.9.3 6.2.4.11	13
[3.6]	Calculation of the structure gauge for the lower parts for the 1668 mm track gauge	Appendix P	5, 7 and 10
[4]	Railway applications – Track – Track alignment design parameters – Track gauges 1435mm and wider	EN 13803	2017
[4.1]	Minimum radius of horizontal curve Definition of reference vehicle	4.2.3.4 (2)	Tables N.1 and N.2 N.2
[4.2]	Upgrading or renewal of the infrastructure, for parameters cant and cant deficiency	7.3.2	6.2 (table 5) and 6.3 (table 7 for non-tilting trains) (see also e.g. notes 2 and 3 in both chapters).
[5]	Railway applications – Method for determining the equivalent conicity	EN 15302	2021
[5.1]	Equivalent conicity	4.2.4.5 (4)	6, 8, 9, 12
[5.2]	Assessment	6.2.4.6	6, 8, 9, 12
[6]	Railway applications – Wheelsets and bogies – Wheels – Tread profile	EN 13715	2020

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
[6.1]	<u>Equivalent conicity</u>	<u>4.2.4.5 (4) (a) and (b)</u>	<u>Annex C</u>
[6.2]	<u>Equivalent conicity</u>	<u>4.2.4.5 (4) (c) and (d)</u>	<u>Annex B</u>
[7]	<u>Railway applications – Track – Rail – Part 1: Vignole railway rails 46 kg/m and above</u>	<u>EN 13674-1</u>	<u>2011+A1:2017</u>
[7.1]	<u>Railhead profile for plain line</u>	<u>4.2.4.6 (1)</u>	<u>Annex A</u>
[7.2]	<u>Assessment of rails</u>	<u>6.1.5.1 (a)</u>	<u>9.1.8</u>
[7.3]	<u>Assessment of rails</u>	<u>6.1.5.1 (b)</u>	<u>9.1.9</u>
[7.4]	<u>Assessment of rails</u>	<u>6.1.5.1 (c)</u>	<u>8.1 and 8.4</u>
[8]	<u>Railway applications – Track – Rail – Part 4: Vignole railway rails from 27 kg/m to, but excluding 46 kg/m</u>	<u>EN 13674-4</u>	<u>2006+A1:2009</u>
[8.1]	<u>Railhead profile for plain line</u>	<u>4.2.4.6 (1)</u>	<u>Annex A</u>
[9]	<u>Railway applications – Testing and Simulation for the acceptance of running characteristics of railway vehicles – Running Behaviour and stationary tests</u>	<u>EN 14363</u>	<u>2016</u>
[9.1]	<u>Track resistance to vertical loads</u> <u>Lateral track resistance</u>	<u>4.2.6.1 (b) and (c)</u> <u>4.2.6.3 (b)</u>	<u>5.3.2.3</u>
[9.2]	<u>Lateral track resistance</u>	<u>4.2.6.3 (a)</u>	<u>5.3.2.2</u>
[10]	<u>Eurocode 1 : Actions on structures – Part 2 : Traffic loads on bridges</u>	<u>EN 1991-2</u>	<u>2003/AC:2010</u>
[10.1]	<u>Structures resistance to traffic loads</u>	<u>4.2.7</u>	
[10.2]	<u>Resistance of new bridges to traffic loads</u> <u>Vertical loads</u> <u>Equivalent vertical loading for new geotechnical structures, earthworks and earth pressure effects</u>	<u>4.2.7.1.1 (1)</u> <u>4.2.7.2</u> <u>Appendix E – Load Model 71 – note 19</u>	<u>6.3.2 (2)P ⁽¹⁾</u>

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
	<u>Capability requirements for existing structures according to traffic code</u>		
[10.3]	<u>Resistance of new bridges to traffic loads</u> <u>Vertical loads</u> <u>Equivalent vertical loading for new geotechnical structures, earthworks and earth pressure effects</u> <u>Capability requirements for existing structures according to traffic code</u>	<u>4.2.7.1.1 (1)</u> <u>4.2.7.2</u> <u>Appendix E – Load model SW/0</u>	<u>6.3.3 (3)P</u>
[10.4]	<u>Resistance of new bridges to traffic loads</u> <u>Vertical loads</u>	<u>4.2.7.1.1 (2)</u>	<u>6.3.2 (3)P and 6.3.3 (5)P</u>
[10.5]	<u>Allowance for dynamic effects of vertical loads</u>	<u>4.2.7.1.2 (1)</u>	<u>6.4.3 (1)P and 6.4.5.2 (2)</u>
[10.6]	<u>Allowance for dynamic effects of vertical loads</u>	<u>4.2.7.1.2 (2)</u>	<u>6.4.4</u>
[10.7]	<u>Allowance for dynamic effects of vertical loads</u> <u>Capability requirements for existing structures according to traffic code</u>	<u>4.2.7.1.2 (2)</u> <u>Appendix E – Load model HSLM</u>	<u>6.4.6.1.1 (3) to (6)</u>
[10.8]	<u>Centrifugal forces</u>	<u>4.2.7.1.3</u>	<u>6.5.1 (2), (4)P and (7)</u>
[10.9]	<u>Nosing forces</u>	<u>4.2.7.1.4</u>	<u>6.5.2</u>
[10.10]	<u>Actions due to traction and braking (longitudinal loads)</u>	<u>4.2.7.1.5</u>	<u>6.5.3 (2)P, (4), (5), (6).and (7)P</u>
[10.11]	<u>Resistance of new structures over or adjacent to tracks</u>	<u>4.2.7.3</u>	<u>6.6.2 to 6.6.6</u>
[11]	<u>Eurocode – Basis of structural design</u>	<u>Annex A2 to EN 1990:2002 issued as EN 1990:2002/A1:2005</u>	
[11.1]	<u>Structures resistance to traffic loads</u>	<u>4.2.7</u>	

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
[11.2]	Design track twist due to rail traffic actions	4.2.7.1.6	A2.4.4.2.2(3)P
[12]	Railway applications – Track – Track geometry quality – Part 5: Geometric quality levels – Plain line, switches and crossings	EN 13848-5	2017
[12.1]	The immediate action limit for alignment	4.2.8.1 (1)	7.5 Limits of wavelength range D1 set out in table 5
[12.2]	The immediate action limit for longitudinal level	4.2.8.2 (1)	7.3 Limits of wavelength range D1 set out in table 4
[12.3]	The immediate action limit for track twist	4.2.8.3 (2)	7.6
[12.4]	The immediate action limit for track twist - 1668 mm track gauge system	4.2.8.3 (6)	Annex C
[13]	Railway applications – Track – Track geometry quality – Part 1: Characterization of track geometry	EN 13848-1	2019
[13.1]	The immediate action limit for track twist	4.2.8.3 (1)	6.5
[14]	Railway applications – Aerodynamics – Part 5: Requirements and test procedures for aerodynamics in tunnels	EN 14067-5	2006+A1:2010
[14.1]	Assessment of maximum pressure variations in tunnels	6.2.4.12	4 and 6
[15]	Railway applications – Track – Wood sleepers and bearers	EN 13145	2001
[15.1]	Resistance to vertical loads	Appendix C.1 (c) Appendix C.2 (c)	

<u>Index</u>	<u>Standards name</u>	<u>Standard Reference</u>	<u>Standard version</u>
[16]	<u>Metallic materials – Brinell hardness test. Test method.</u>	<u>EN ISO 6506-1</u>	<u>2014</u>
[16.1]	<u>Definition of steel hardness</u>	<u>Appendix S</u>	
[17]	<u>Railway applications – Track – Switches and crossings – Part 3: Requirements for wheel/rail interaction</u>	<u>EN 13232-3</u>	<u>2003</u>
[17.1]	<u>Definition of the ‘unguided length of an obtuse crossing’</u>	<u>Appendix S</u>	<u>4.2.5</u>

(1) If agreed by the NSA, it is permitted to design geotechnical structures, earthworks and calculate earth pressure effects using line loads or point loads, where their load effects correspond to the Load Model 71 with factor alpha.

Index No.	Reference	Document name	Version (year)	BP(s) concerned
1	EN 13674-1	Railway applications – Track – Rail Part 1: Vignole railway rails 46 kg/m and above	2011	Railhead profile for plain line (4.2.4.6), Assessment of rails (6.1.5.1)
2	EN 13674-4	Railway applications – Track – Rail – Part 4: Vignole railway rails from 27 kg/m to, but excluding 46 kg/m (with Amendment A1:2009)	2006	Railhead profile for plain line (4.2.4.6)
3	EN 13715	Railway applications – Wheelsets and bogies – Wheels – Wheels tread (with Amendment A1:2010)	2006 A1:2010 <u>2020</u>	Equivalent conicity (4.2.4.5)
4	EN 13848-1	Track geometry quality – Part 1: Characterisation of track geometry (with Amendment A1:2008)	2003 A1:2008 <u>2019</u> <u>paragraph 6.5</u>	The immediate action limit for track twist (4.2.8.3)
5	EN 13848-5	Railway applications – Track – Track geometry	2008	The immediate action limit for alignment

Index No.	Reference	Document name	Version (year)	BP(s) concerned
		quality—Part 5: Geometric quality levels—Plain line (with Amendment A1:2010)		(4.2.8.1), The immediate action limit for longitudinal level (4.2.8.2), The immediate action limit for track twist (4.2.8.3)
6	EN 14067-5	Railway applications—Aerodynamics—Part 5: Requirements and test procedures for aerodynamics in tunnels (with Amendment A1:2010)	2006	Assessment of maximum pressure variations in tunnels (6.2.4.12)
7	EN 15273-3	Railway applications—Gauges—Part 3: Structure gauges	2013	Structure gauge (4.2.3.1), Distance between track centres (4.2.3.2), Platform offset (4.2.9.3), Assessment of structure gauge (6.2.4.1), Assessment of distance between track centres (6.2.4.2), Assessment of platform offset (6.2.4.11)
8	EN 15302	Railway applications—Method for specifying the equivalent conicity (with Amendment A1:2010)	2008	Equivalent conicity (4.2.4.5), Assessment of design values for equivalent conicity (6.2.4.6)
9	EN 15528	Railway applications—Line categories for managing the interface between load limits of vehicles and infrastructure	2015 <u>2021</u>	Capability requirements for structures according to traffic code (Appendix E)

Index No.	Reference	Document name	Version (year)	BP(s) concerned
10	EN 15663	Railway applications – Definition of vehicle reference masses (with Corrections AC:2010/A1:2018)	2009/2017	NTSN categories of line (4.2.1), Basis of minimum requirements for structures for passenger coaches and multiple units (Appendix K)
11	EN 1990	Eurocode – Basis of structural design (with Amendment A1:2005 and Correction AC:2010)	2002	Structures resistance to traffic loads (4.2.7), Resistance of new bridges to traffic loads (4.2.7.1)
12	EN 1991-2	Eurocode 1 – Actions on structures – Part 2: Traffic load on bridges (with Correction AC:2010)	2003	Structures resistance to traffic loads (4.2.7), Resistance of new bridges to traffic loads (4.2.7.1), Equivalent vertical loading for new earthworks and earth pressure effects (4.2.7.2), Resistance of new structures over or adjacent to tracks (4.2.7.3)
13	EN 14363:2005	Railway applications – Testing for the acceptance of running characteristics of railway vehicles – Testing of running behaviour and stationary tests	2005/2016	Track resistance to vertical load (4.2.6.1), Lateral track resistance (4.2.6.3),